



Fastening systems for panel radiators and convectors

The Pala group (Italian: Pale di San Martino, Dolomiti delle Pale or Gruppo delle Pale) is a mountain range in the Dolomites, in the eastern Trentino and part of the province of Belluno, northern Italy. They cover an area of c. 240 km².



FIX IT

1 h 23 min

PALE DI SAN MARTINO



FIX IT



ISO 9001



interseroh
zero waste solutions

Interseroh zero waste solutions



Hexavalent chromium free



Made in Italy

Creativity makes the world a safer place!

We want to make the world a safer place thanks to the creativity of our mechanical fixings,
customized to every aesthetic and functional need.





FIX IT

BRACKETS READY FOR INSTALLATION

Two ready-to-install floor brackets for panel radiators type 11-12-21-22-33, height from 300 to 1000 mm, without central connections. **PK3**: configuration for finished floor. **PK1**: configuration for raw floor.




60741003	2x PK3 + 2x QKP + 2x QKK		AK3	1	250
60741001	2x PK1 + 2x QKF + 2x QKK		AK3	1	170

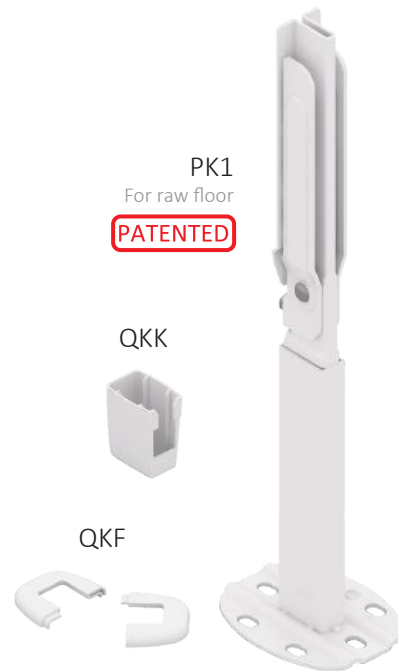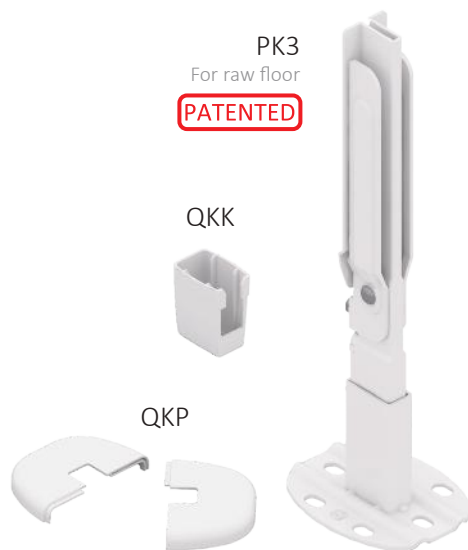

PK3 for finished floor




Measures are expressed in millimeters



PK1 for raw floor



 Assembly instructions

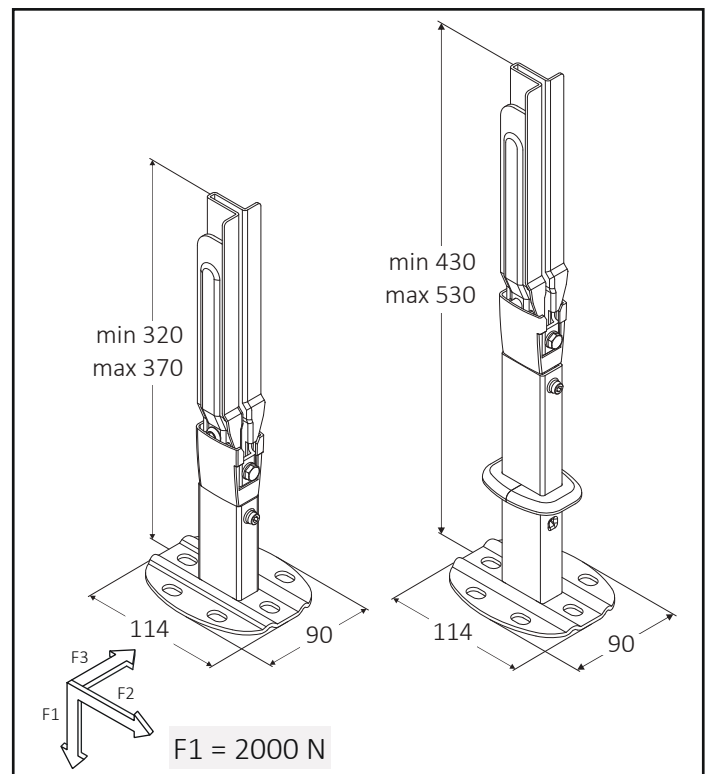

BRACKETS READY FOR INSTALLATION


Two ready-to-install floor brackets for panel radiators type 11-12-21-22-33, height from 150 to 300 mm, without central connections. **PK23**: configuration for finished floor. **PK21**: configuration for raw floor.




60740023	2x PK23 + 2x QKP + 2x QKK	 AK3	1	250
60740021	2x PK21 + 2x QKF + 2x QKK	 AK3	1	170



PK23 for finished floor

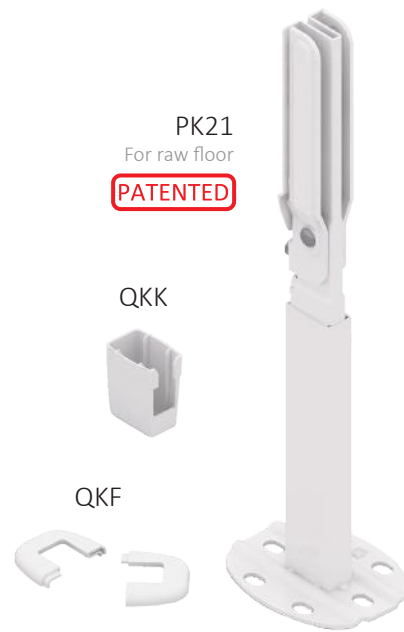




Measures are expressed in millimeters



PK21 for raw floor



Assembly instructions

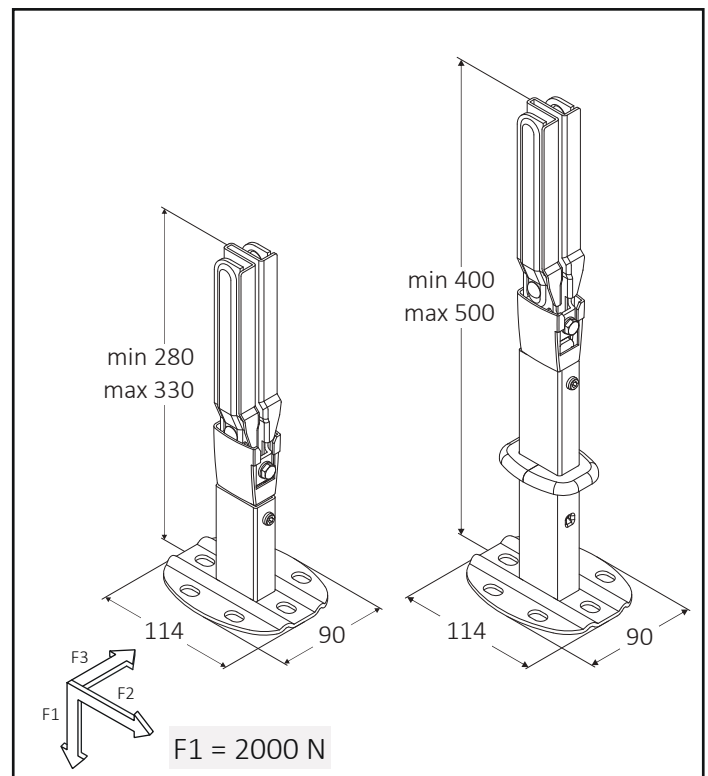


BRACKETS READY FOR INSTALLATION

Two ready-to-install floor brackets for panel radiators type 22-30-33, height from 150 to 1000 mm, with and without central connections. **PX3**: configuration for finished floor. **PX1**: configuration for raw floor.



60753030	2x PX3 + 2x QKP	 AK3	1	150
60753010	2x PX1 + 2x QKF	 AK3	1	110

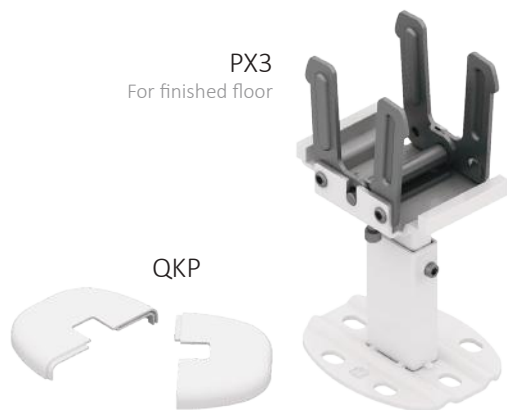


PX3 for finished floor




Widths PX3 and PX1



Measures are expressed in millimeters



PX1 for raw floor

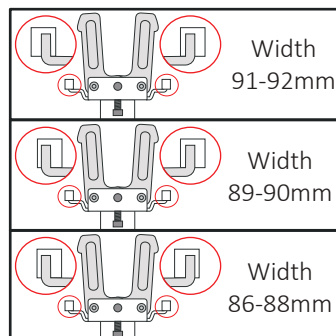

Assembly instructions

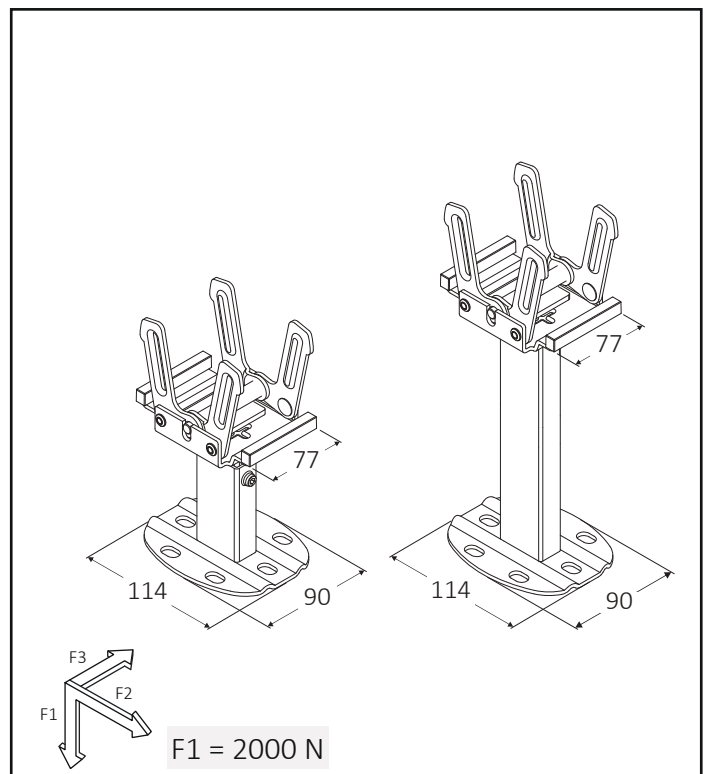

BRACKETS READY FOR INSTALLATION

Two ready-to-install floor brackets for plain panel radiators type 22-30-33, height from 150 to 1000 mm, with and without central connections. **PX3-P**: configuration for finished floor. **PX1-P**: configuration for raw floor.



60753031	2x PX3-P + 2x QKP	1	150
60753011	2x PX1-P + 2x QKF	1	110




PX3-P for finished floor




PX1-P
For raw floor

Widths PX3-P and PX1-P



Measures are expressed in millimeters



PX1-P for raw floor



Assembly instructions

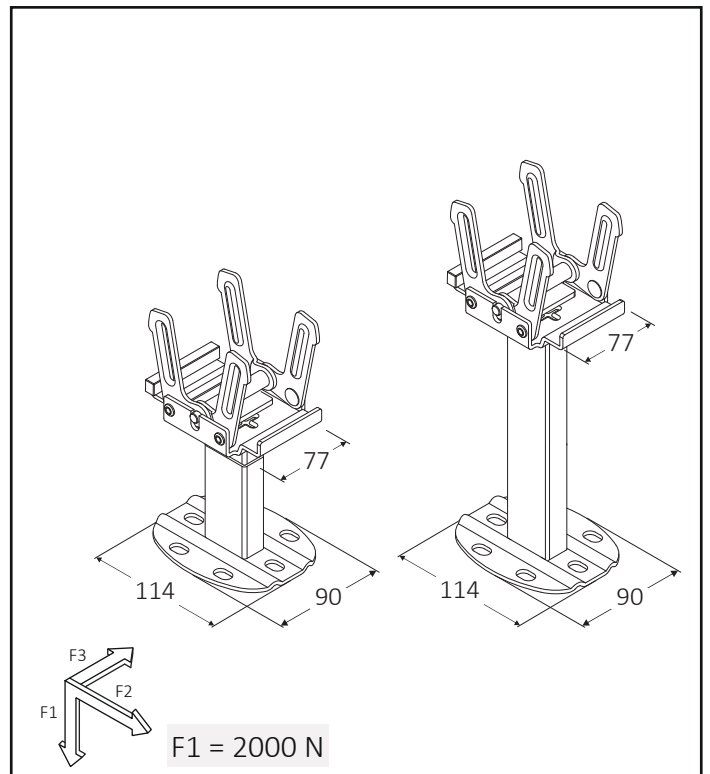

BRACKETS READY FOR INSTALLATION

Two ready-to-install floor brackets for panel radiators type 20, height from 150 to 1000 mm, without central connections. **PX20-3**: configuration for finished floor. **PX20-1**: configuration for raw floor.




ON REQUEST 2x PX20-3 + 2x QKP

ON REQUEST 2x PX20-1 + 2x QKF






PX20-3 for finished floor

Measures are expressed in millimeters



PX20-1 for raw floor


Without convectors

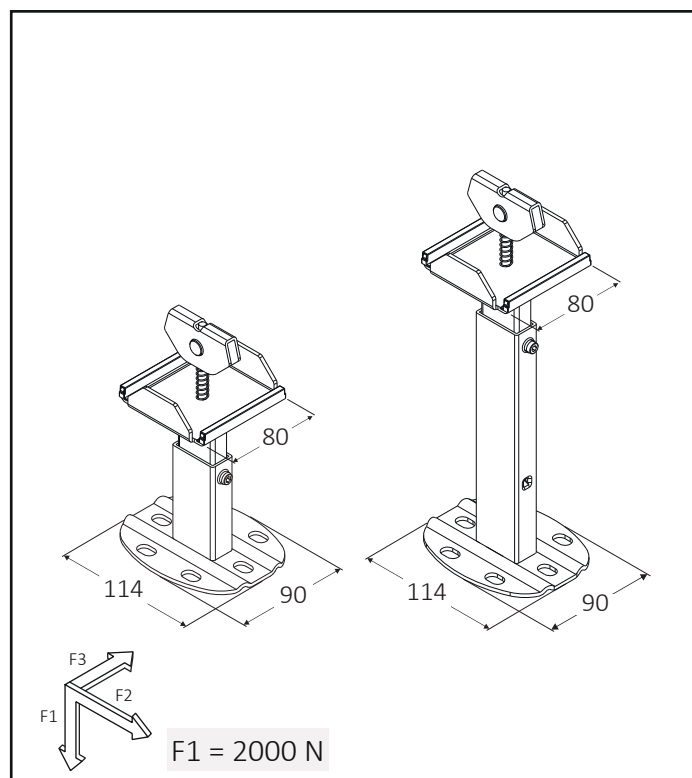

BRACKETS READY FOR INSTALLATION

Two ready-to-install floor brackets for convectors. **PKK-3**: configuration for finished floor. **PKK**: configuration for raw floor. **PKK-1**: configuration for raw floor.



					
60744013	2x PKK-3 + 2x QKP		AK3	1	160
60744010	2x PKK + 2x QKF		AK3	1	150
60744011	2x PKK-1 + 2x QKF		AK3	1	110

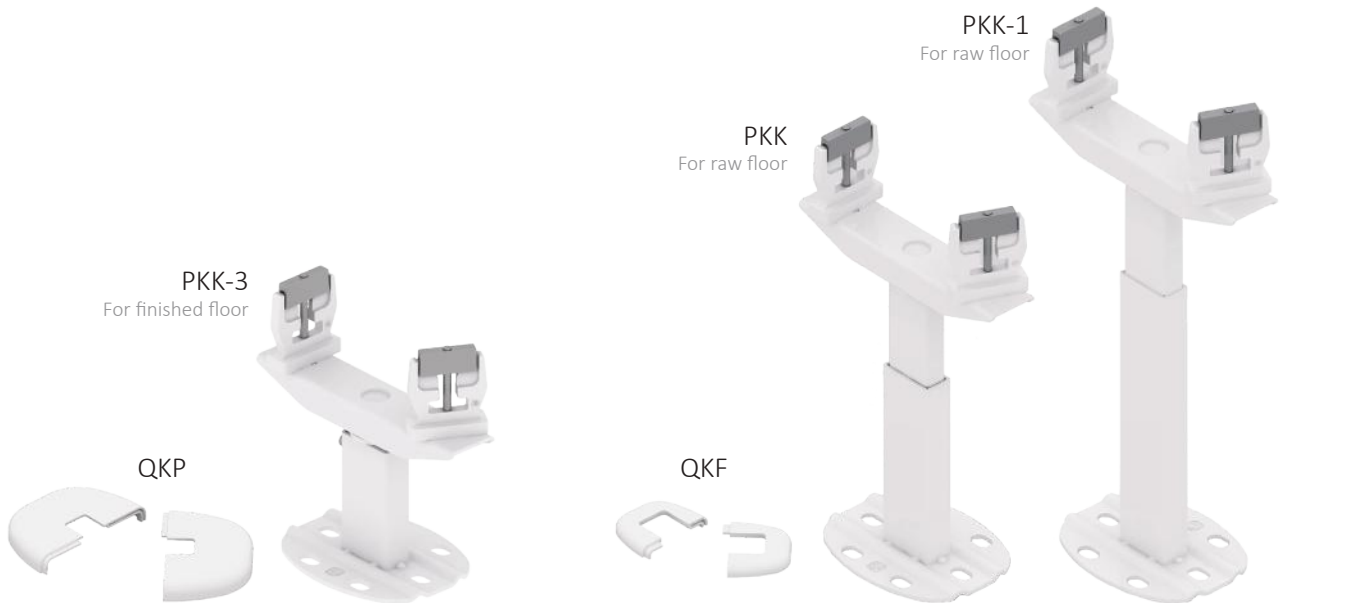


Regulations

Widths

Measures are expressed in millimeters

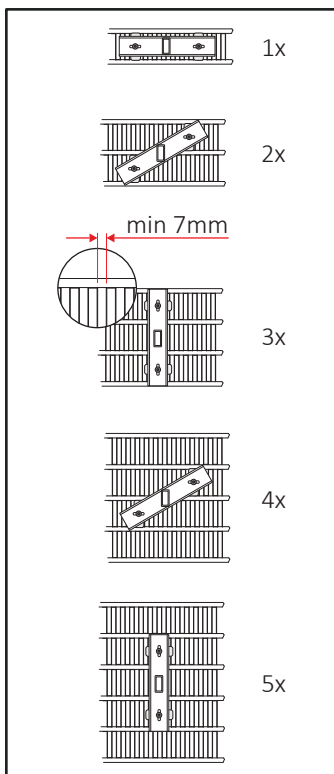

Assembly instructions

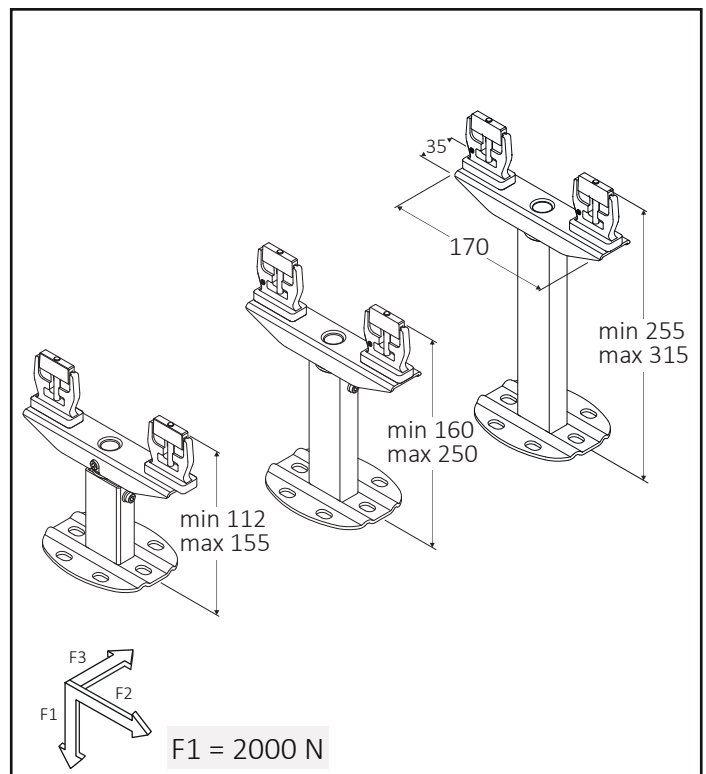


MODULAR BRACKETS

Rectangular section tube for floor bracket composition, for panel radiators with height from 300 to 1000 mm.

QT



60705046	QT 460 mm	25	1500
60705056	QT 560 mm	25	1500
60705066	QT 660 mm	25	1000
60705076	QT 760 mm	25	1000
60705086	QT 860 mm	25	1000
60705096	QT 960 mm	25	1000
60705106	QT 1060 mm	25	1000
60705116	QT 1160 mm	25	1000

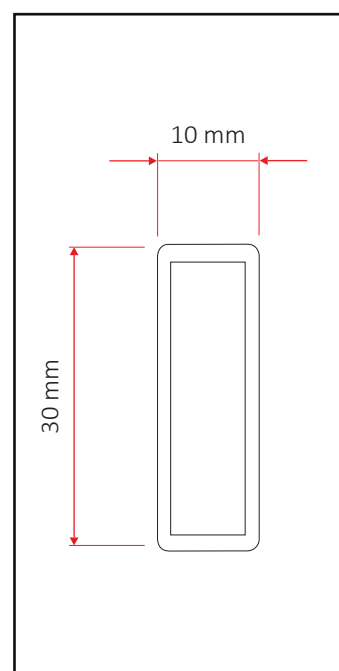


Base with central tube for floor bracket composition, with rectangular tube model **QT**.

QB



QK

60705000	QB	50	2500
60705012	QK	20	3000




Base with decentralized tube for floor bracket composition, with rectangular tube model **QT**.

QBX



QKX

60705005	QBX	50	2500
60705013	QKX	20	4000



MODULAR BRACKETS

Superior fixing **Q1** and lower support **Q7**, for floor bracket composition with rectangular tube model **QT**, width regulation from 65 to 100 mm, bracket inside the radiator, for panel radiators with or without handles type 20-21-22-33.




Q1



Q7

60705900	QN1: 1x Q7 + 1x Q1	50	2750
----------	--------------------	----	------

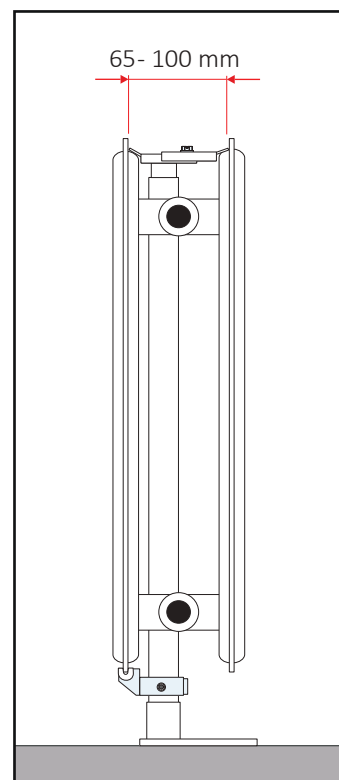

Couple of fixings **Q6**, for floor bracket composition with rectangular tube model **QT**, plug **Q9** in white Nylon; for panel radiators with handles.




Q9



Q6

60705203	QE: 2x Q6 + 1x Q9	50	2750
----------	-------------------	----	------

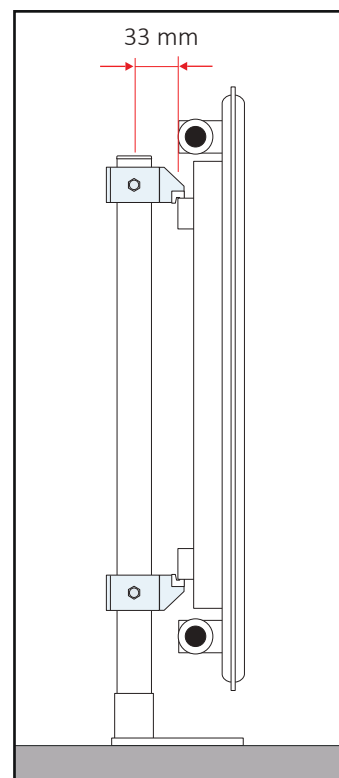

COVERS AND EXTENSIONS

VL: 10 cm extension for all ready-to-install floor brackets. **QKR**: tube-cover in white ABS, for all ready-to-install floor brackets, configuration for finished floor. **QKP** and **QKF**: base-cover in white ABS, supplied with all ready-to-install floor brackets.



60740004	1x VL (+ 10cm)	50	1050
60705024	2x QKR	25	2000
60705020	1x QKP	20	3000
60705022	1x QKF	20	4000



VL



QKR




QKP



QKF

Measures are expressed in millimeters

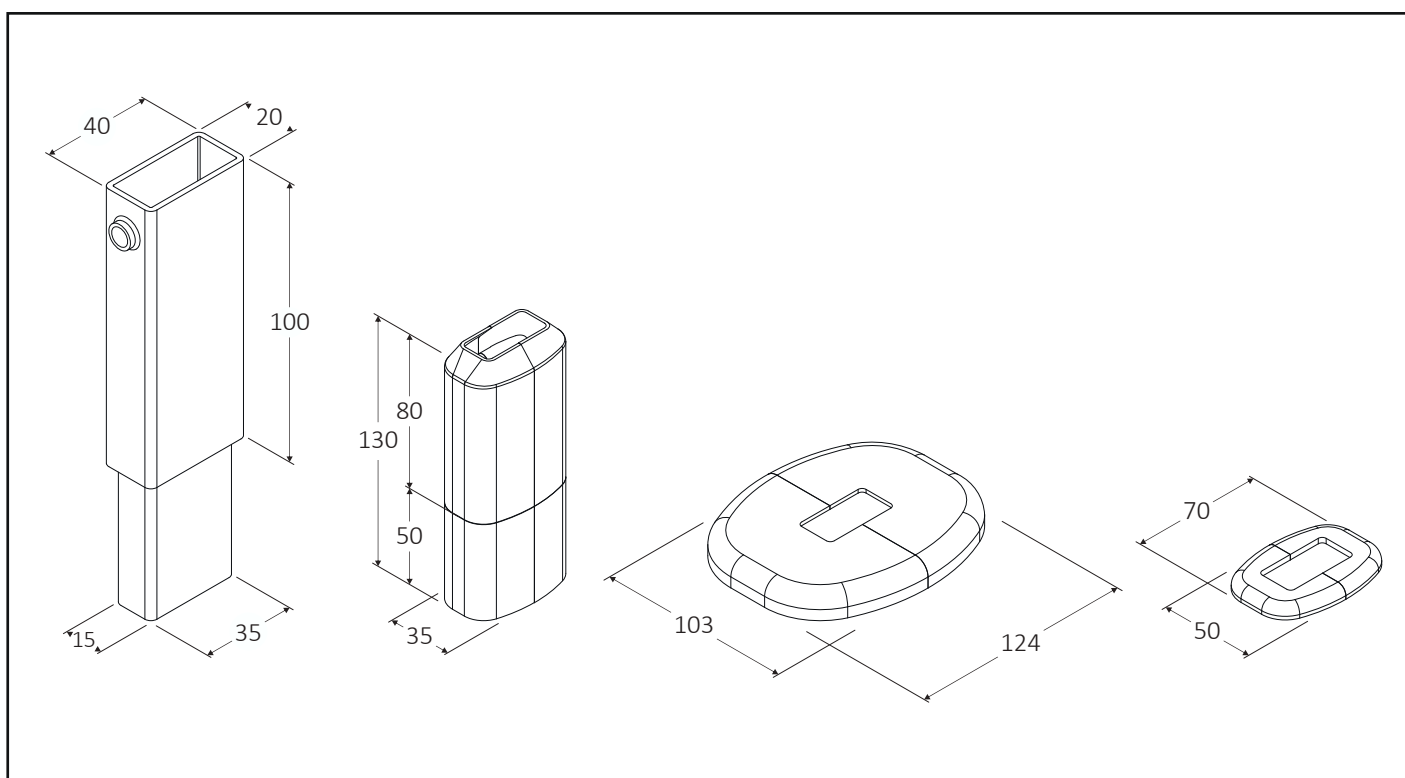

WALL RAIL BRACKETS

Two ready-to-install wall brackets for horizontal panel radiators with or without handles, multi-adjustable head, capacity: 150 kg each bracket. If mounted with safety **SC6** (article available separately), the installation complies with class 3 VDI 6036.

L = Length hook in mm: 3 - 6,5 - 7,5 - 8,5 - 9,5 - 10,5 (see table below).




F7V
Easy


PATENTED

6063L030	2x F7V EASY H 300		AK2	50	800
6063L040	2x F7V EASY H 400		AK2	50	800
6063L050	2x F7V EASY H 500		AK2	30	840
6063L060	2x F7V EASY H 600		AK2	30	630
6063L070	2x F7V EASY H 700		AK2	25	350
6063L090	2x F7V EASY H 900		AK2	20	280
60550004	2x SC6 VDI 6036		AK3	100	30000

Measures are expressed in millimeters

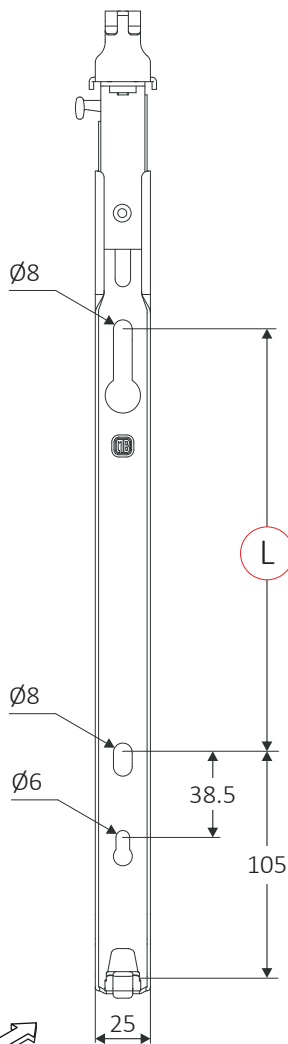


H=300 → L=74
H=400 → L=174
H=500 → L=274
H=600 → L=374
H=700 → L=474
H=900 → L=674




F1 = 1500 N

L= 3-6.5-7.5-8.5-9.5-10.5mm



SC6: safety device anti-slipping



Assembly instructions



SC6
Safety device



WALL RAIL BRACKETS

Two ready-to-install wall brackets for horizontal panel radiators “round bottom” with or without handles, multi-adjustable head, capacity: 150 kg each bracket.

L = Length hook in mm: 3 - 6,5 - 7,5 - 8,5 - 9,5 - 10,5 (see table below).




F7RB
Easy

PATENTED

6062L030	2x F7RB EASY H 300		AK2	50	600
6062L040	2x F7RB EASY H 400		AK2	50	600
6062L050	2x F7RB EASY H 500		AK2	30	600
6062L060	2x F7RB EASY H 600		AK2	30	450
6062L070	2x F7RB EASY H 700		AK2	25	250
6062L090	2x F7RB EASY H 900		AK2	20	200


Measures are expressed in millimeters

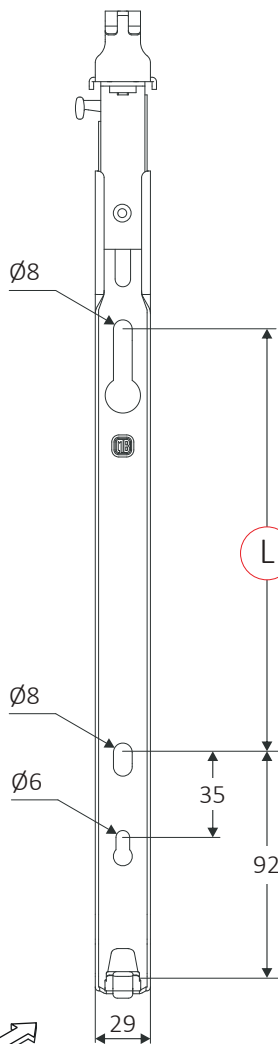



H=300 → L=92
H=400 → L=192
H=500 → L=292
H=600 → L=392
H=700 → L=492
H=900 → L=692

F1 = 1500 N

L= 3-6.5-7.5-8.5-9.5-10.5mm



Lower radius insulator

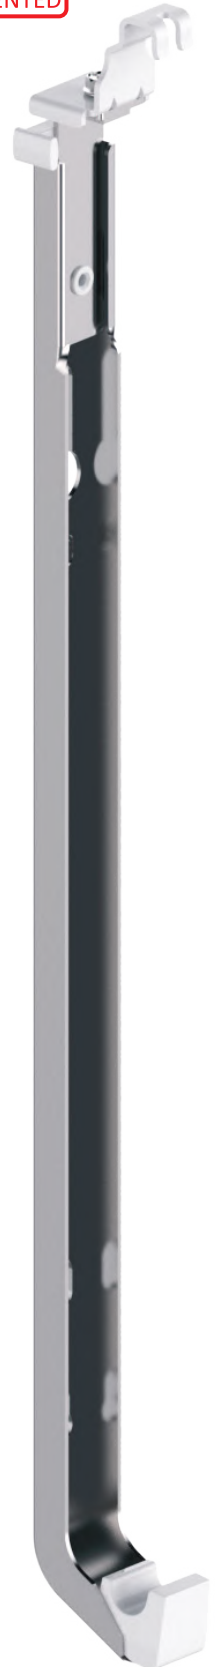

WALL RAIL BRACKETS

Two ready-to-install wall brackets for vertical panel radiators with or without handles, multi-adjustable head, capacity: 150 kg each bracket. If mounted with safety **SC6**, the installation complies with class 3 VDI 6036.

L = Length hook in mm: 3 - 6,5 - 7,5 - 8,5 - 9,5 - 10,5 (see table below).



F7VERT
Easy

6063L070T

2x F7VERT EASY + 2x SC6





AK3

25


300

PATENTED

Measures are expressed in millimeters

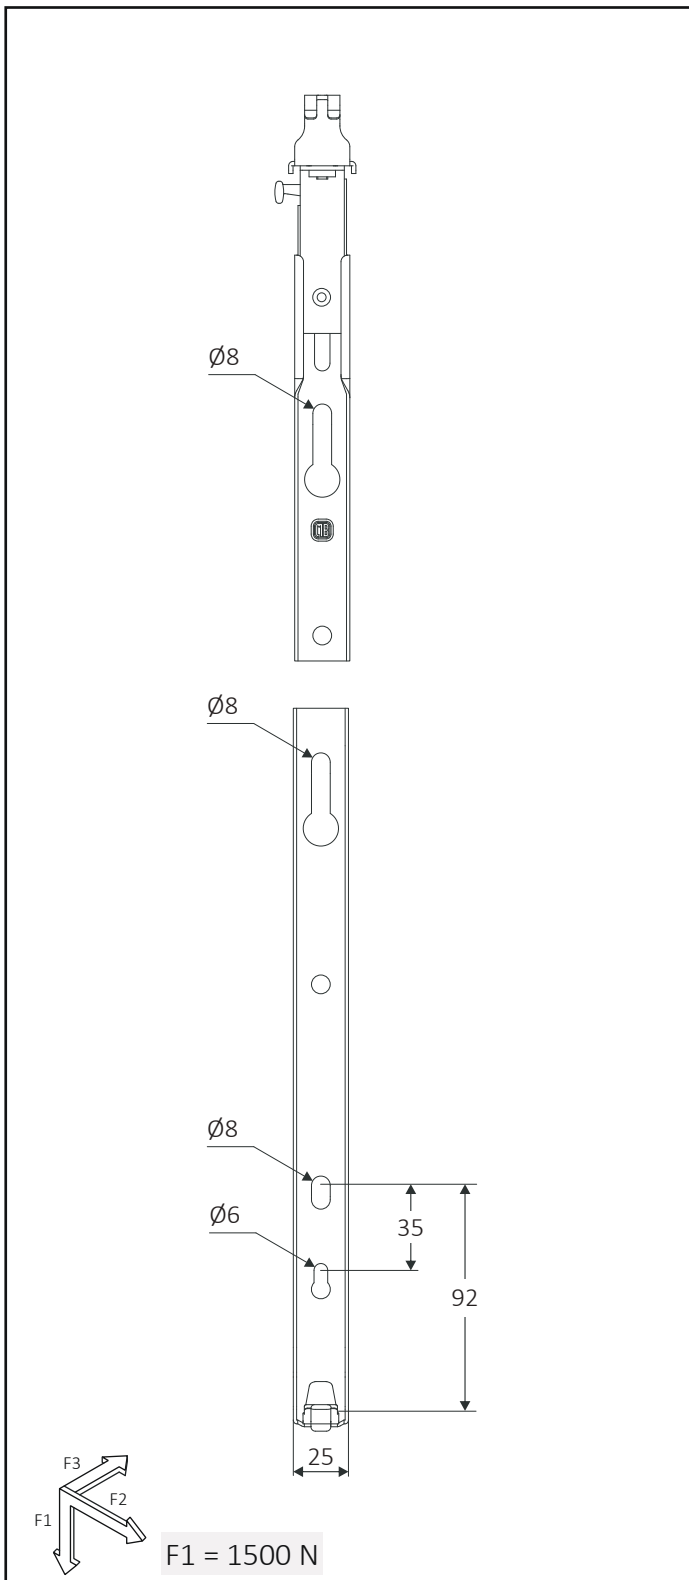

Distance F7VERT

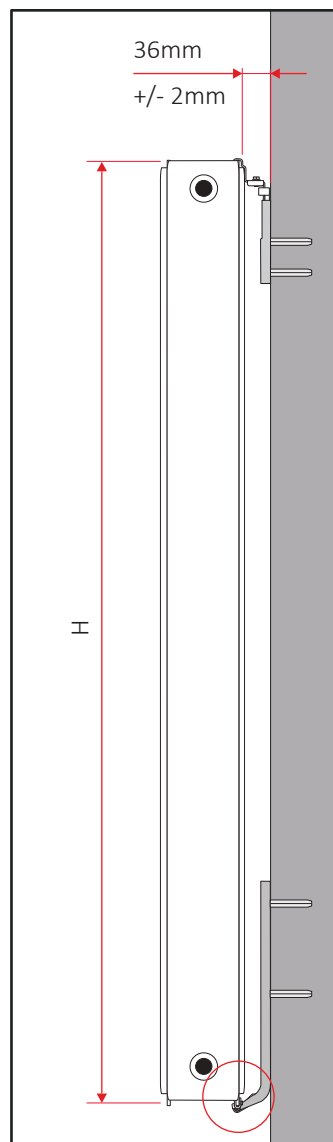

SC6
Safety device


WALL RAIL BRACKETS

Two ready-to-install wall brackets for horizontal panel radiators type 10 and 11 with or without grille, with or without handles. Available also in version for sanitary installations, multi-adjustable head.



ON REQUEST 2x F7LG

ON REQUEST 2x F7L3

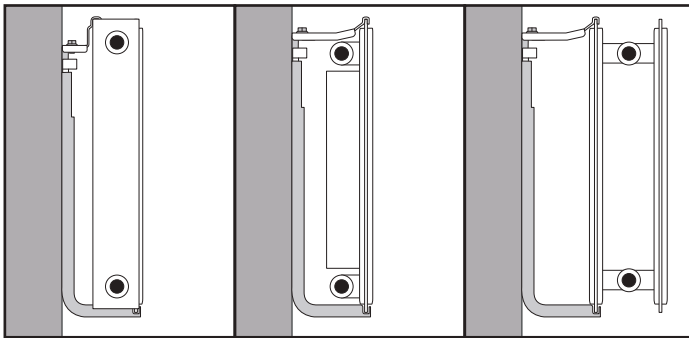


F7LG
10-11 with grille

F7L3
10-11 without grille

F7L3
for Clean



Measures are expressed in millimeters

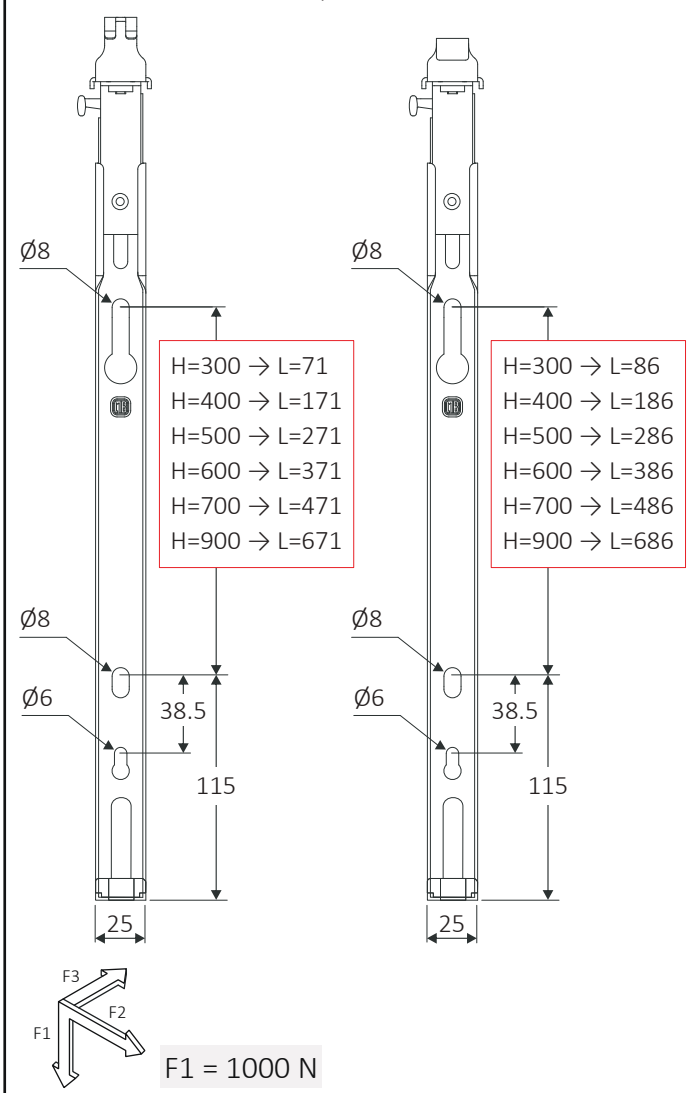

WALL RAIL BRACKETS

Brackets for quick wall mounting, for horizontal panel radiators with rear handles, with safety device anti-hooking/anti-slipping **SC5** integrated. Plastic insulators included. **GB1** is produced in different sizes, depending on the type and size of the radiator.



60550007

2x SC5



AK3

50

7500

ON REQUEST


2x GB1

SC5
Safety device


PATENTED

GB1




Measures are expressed in millimeters

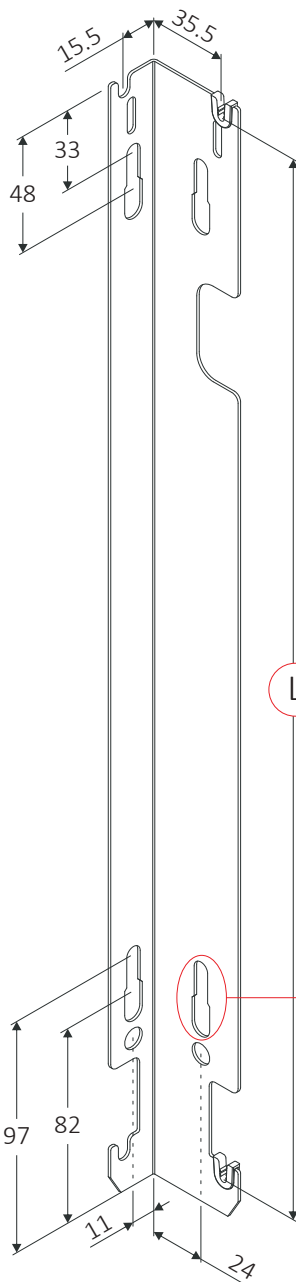


SC5




H=400 → L=205
H=500 → L=305
H=600 → L=405
H=700 → L=505
H=900 → L=705



Dimension rear handle



Assembly instructions



F1 = 750 N



WALL RAIL BRACKETS

Brackets for quick wall mounting, for horizontal panel radiators with rear handles, with safety device anti-hooking, micro-adjustable head approaching handle. Plastic insulators included.





60688210	2x F8 H 400		AK3	50	800
60688310	2x F8 H 500		AK3	30	840
60688410	2x F8 H 600		AK3	30	840
60688710	2x F8 H 900		AK3	25	350

OTHER HEIGHTS ON REQUEST



F8

Measures are expressed in millimeters

VDI 6036 AK3

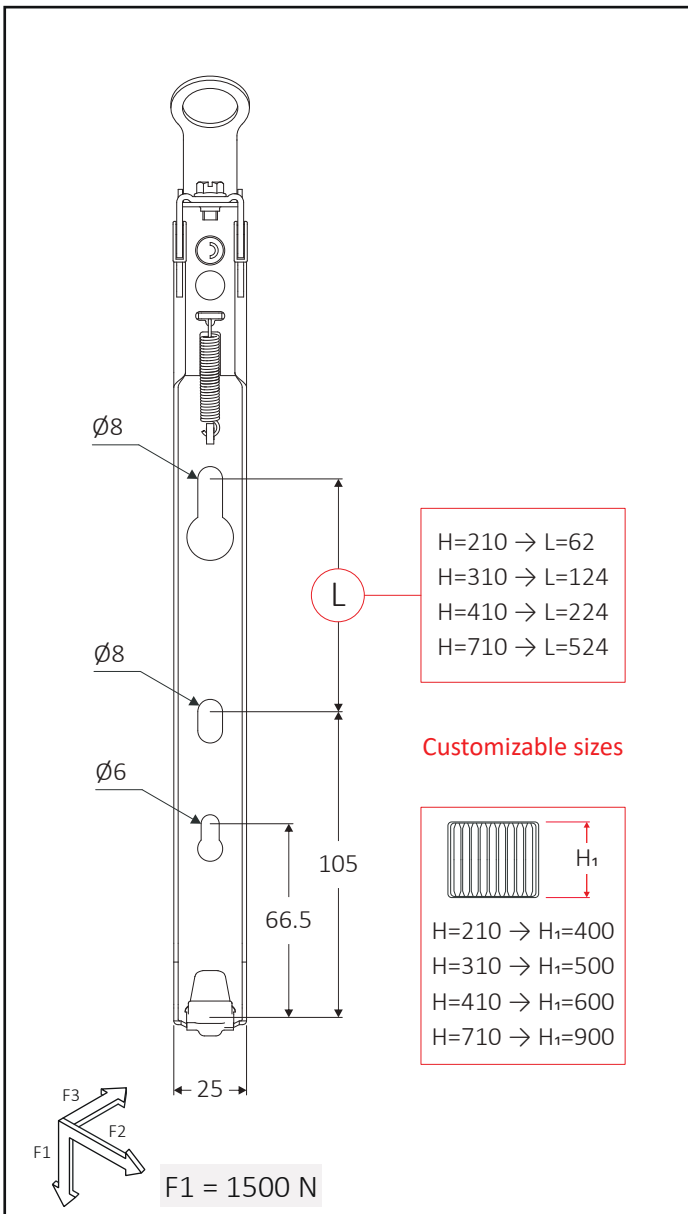

Height (H) on request

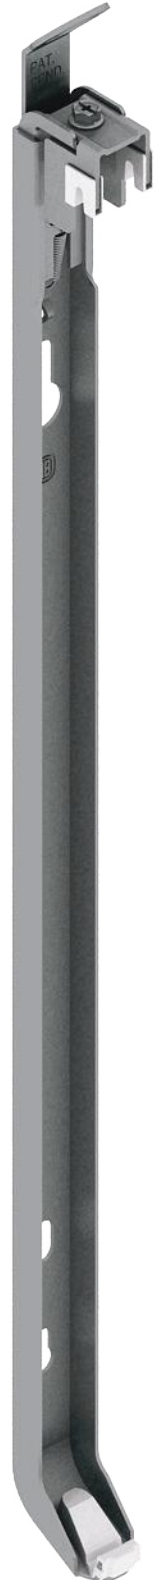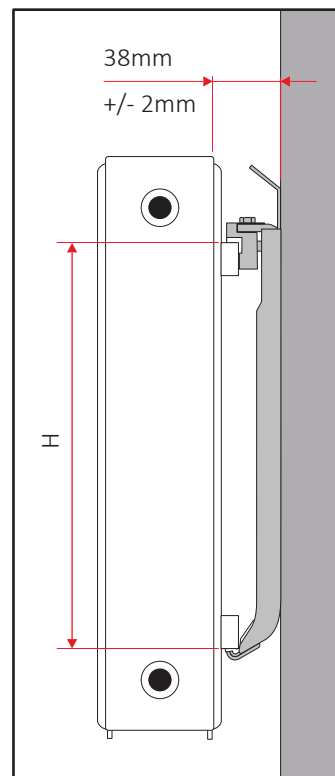

WALL RAIL BRACKETS

Brackets for quick wall mounting, for vertical panel radiators with rear handles, with safety device anti-hooking, micro-adjustable head approaching handle. Plastic insulators included.



60688390T0

2x F8VERT





AK2

25


800

F8VERT

Measures are expressed in millimeters

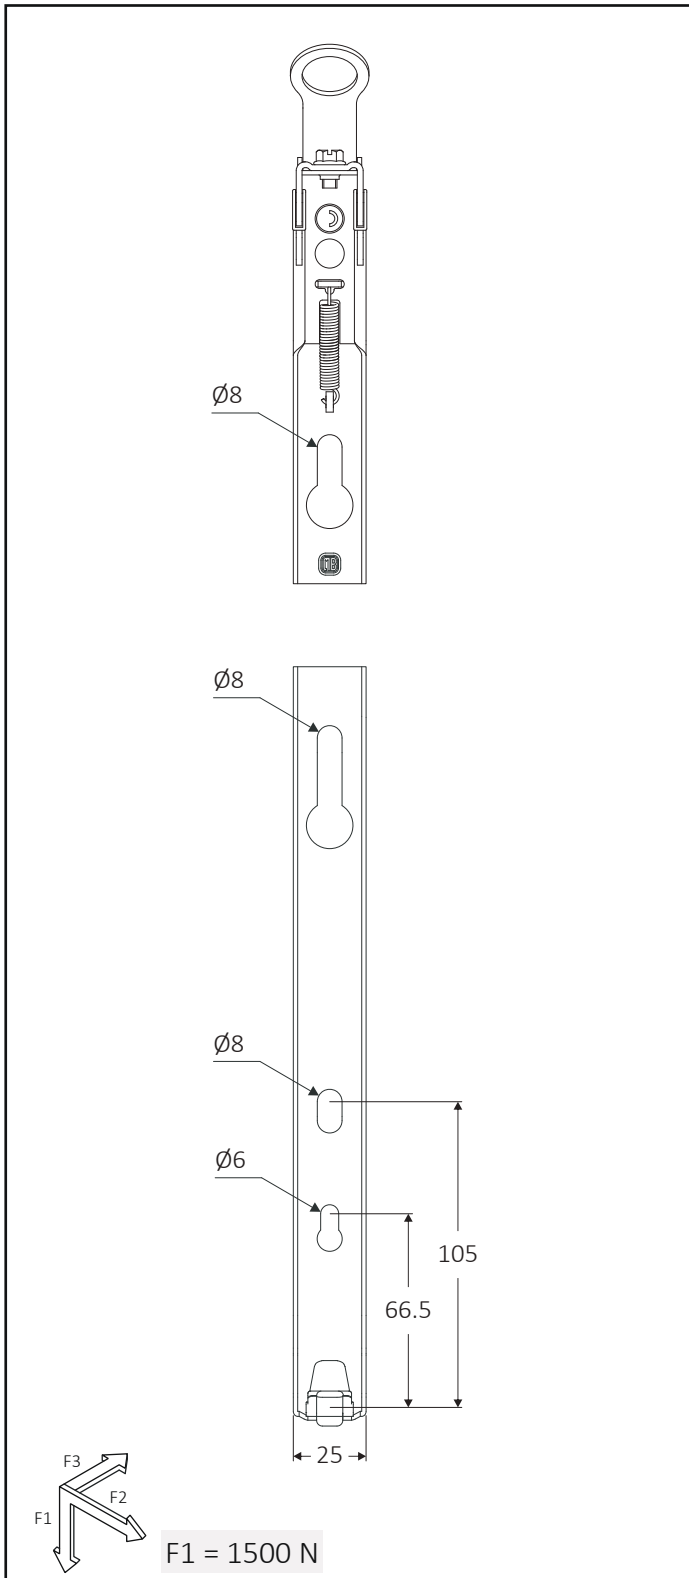

Distance F8VERT

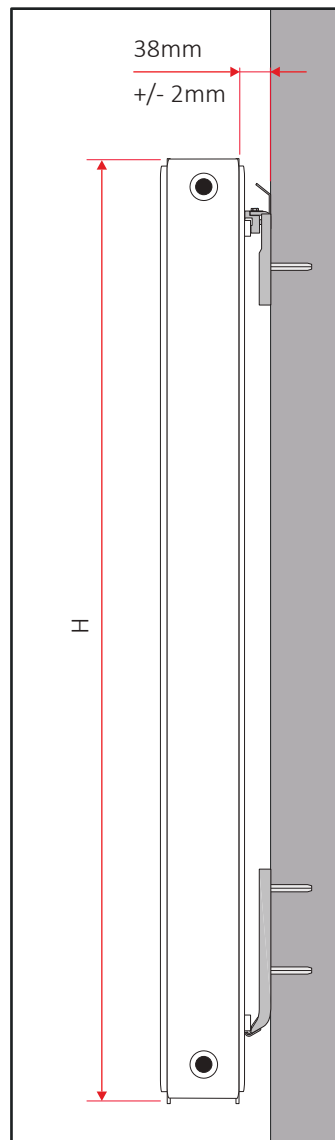






WALL BRACKETS

Ready-to-install wall brackets **PKKW** for convectors, base-cover **QKP** in white ABS included.



60744031	2x PKKW-1 + 2x QKP		AK2	1	150
60744032	2x PKKW-2 + 2x QKP		AK2	1	150
60744033	2x PKKW-3 + 2x QKP		AK2	1	150
60744034	2x PKKW-4 + 2x QKP		AK2	1	150

Measures are expressed in millimeters

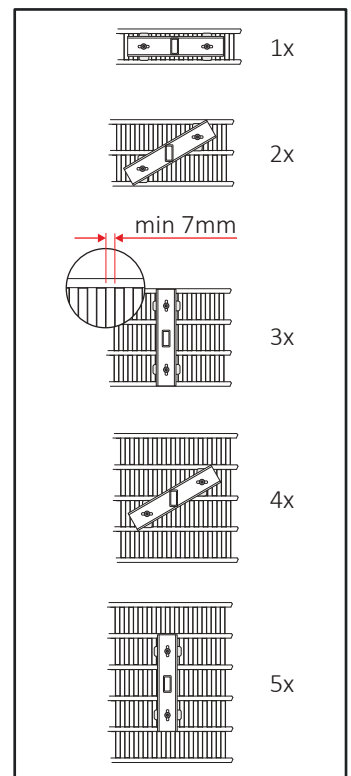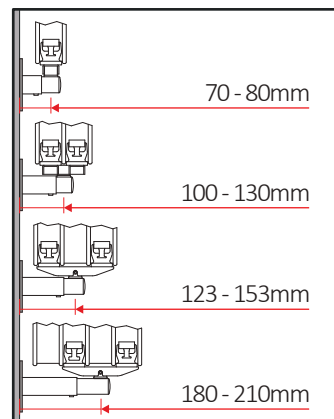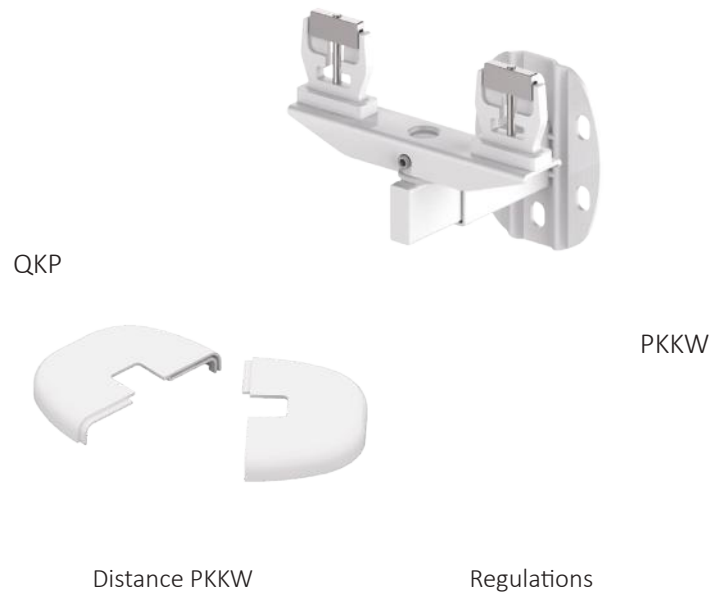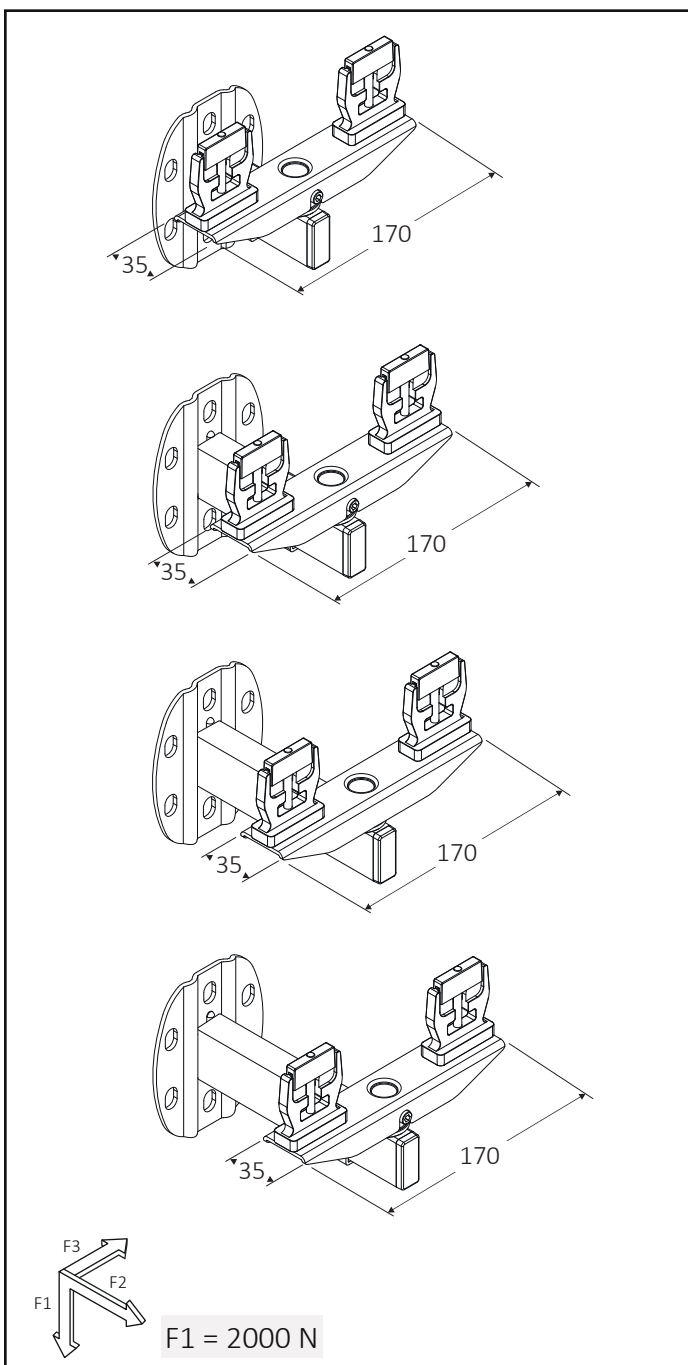

WALL BRACKETS

A1 B4: Ready-to-install wall brackets for horizontal and vertical panel radiators with or without rear handles, adjustable head and base. **A10 B30:** Ready-to-install wall brackets for panel radiators with handles, adjustable head. **B30** with possible adjustment for distance handle to wall (68-82 mm). Plastic insulators included.

L = Length hook in mm: 6,5 - 7,5 - 8,5 - 9,5 - 10,5 (see table below).




604003L5	2x A1 + 2x B4	50	2500
60400310	2x A10 + 2x B30	50	2000



A1



B4

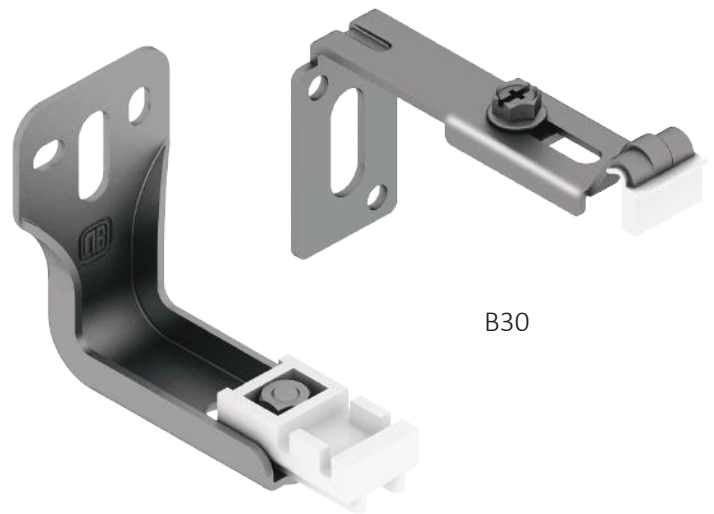

A10






B30

Distance A1 B4

Distance A10 B30

Measures are expressed in millimeters

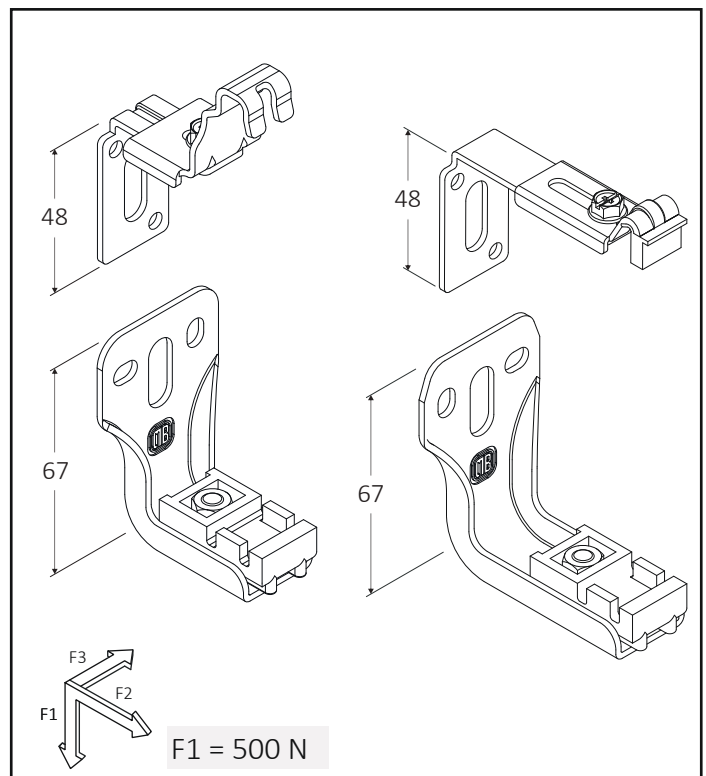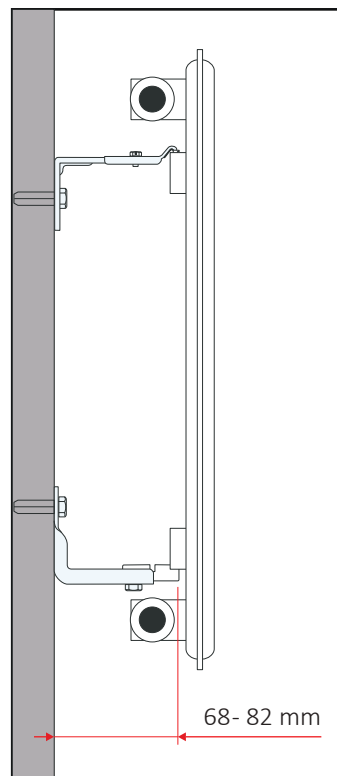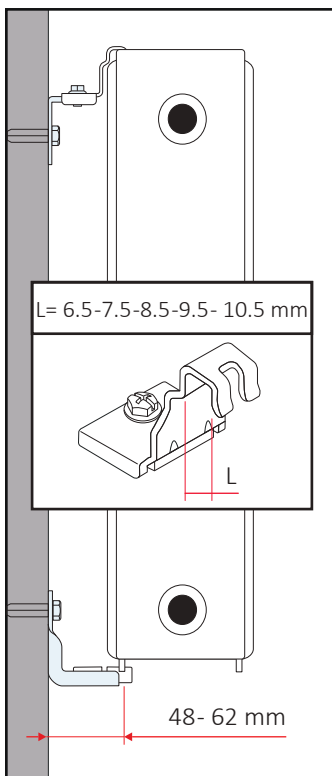


WALL BRACKETS


Ready-to-install wall brackets with spacer **NS** in white plastic, for horizontal and vertical panel radiators with rear handles. Plastic insulators included. **D2**: radiators type 20-21-22-33. Adjustment for distance handle to wall (22-32mm). **D20**: radiators type 10-11. Adjustment for distance handle to wall (35-45 mm).



60400527	2x D2 + 2x NS	50	2750
60400528	2x D20 + 2x NS	50	2000

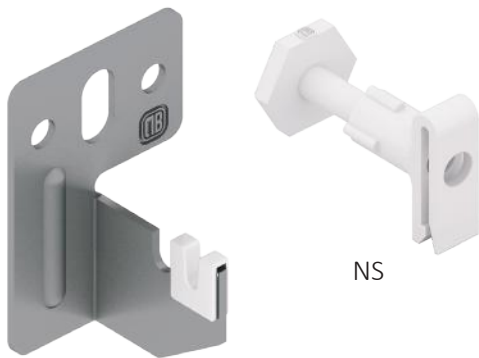

D2



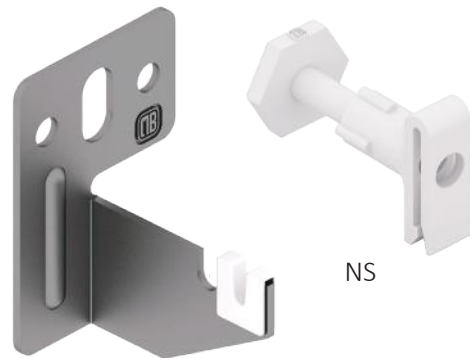


D20

Distance D2

Distance D20

Measures are expressed in millimeters

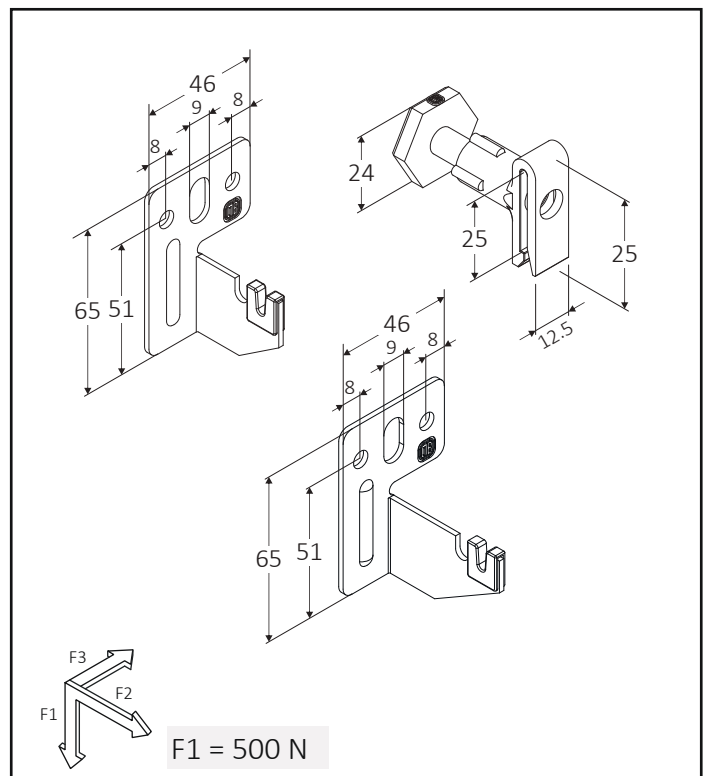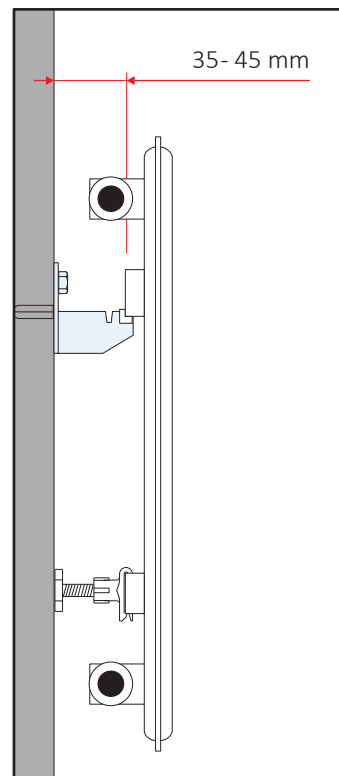
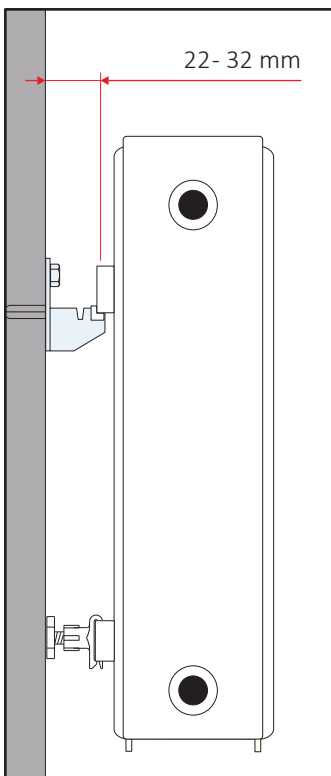


WALL BRACKETS

Ready-to-install wall brackets with spacer **NS** in white plastic and anti-hooking system **SC3**, for horizontal and vertical panel radiators with rear handles. Plastic insulators included. **D3**: radiators type 20-21-22-33. Adjustment for distance handle to wall (22-32 mm). **D30**: radiators type 10-11. Adjustment for distance handle to wall (35-45 mm).






60400540	2x D3 + 2x NS + 2x SC3	50	3300
60400541	2x D30 + 2x NS + 2x SC3	50	2000

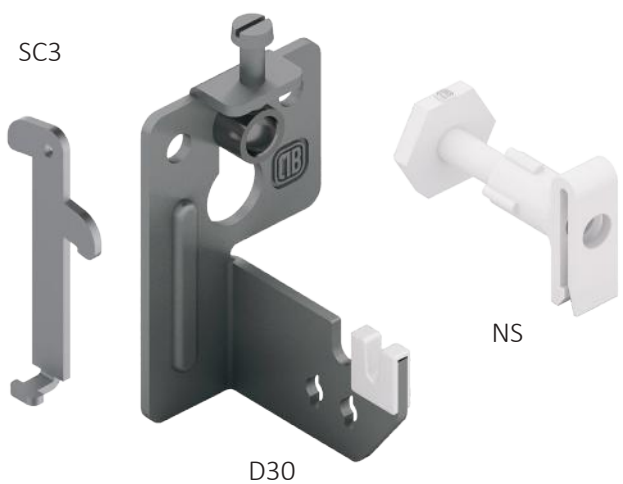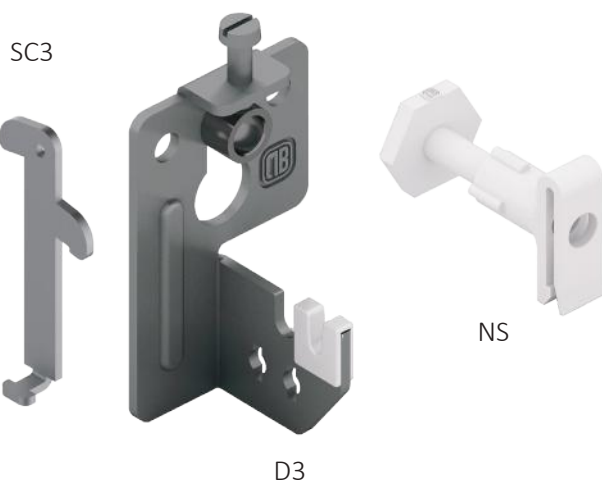

Distance D3

Distance D30

Measures are expressed in millimeters

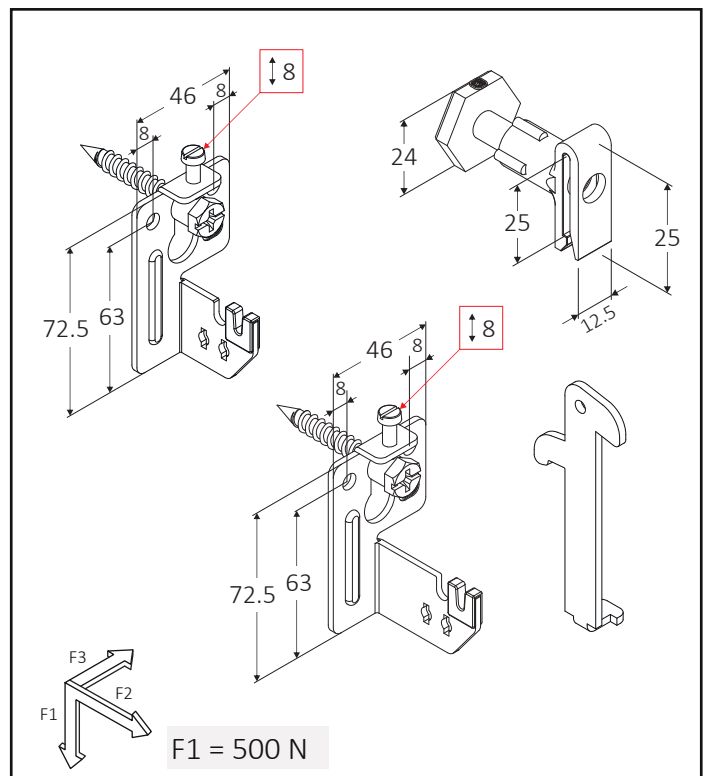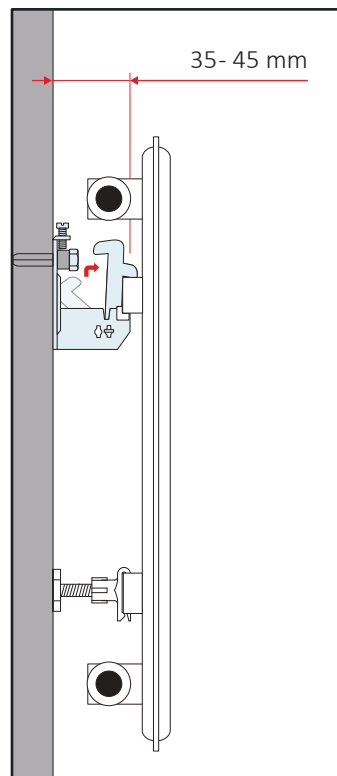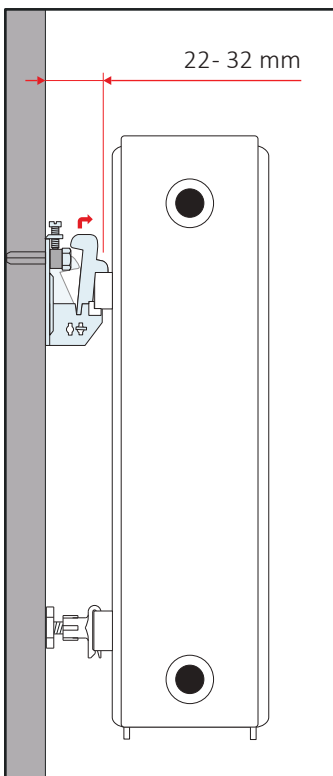


EXPANSION BRACKETS

Kit of two expansion brackets for horizontal and vertical steel panel radiators with handles, with supports **CX** and spacers **NS**. Adjustment for distance from wall (34-66 mm). Plastic insulators included.

NP: transparent extension for spacer **NS**.





60530090	2x C 90 + 2x CX + 2x NS	50	2500
60530120	2x C 120 + 2x CX + 2x NS	50	2500
60530160	2x C 160 + 2x CX + 2x NS	50	2500
60530180	2x C 180 + 2x CX + 2x NS	50	2500
60530240	2x C 240 + 2x CX + 2x NS	50	2000
60020239	NP	100	5500

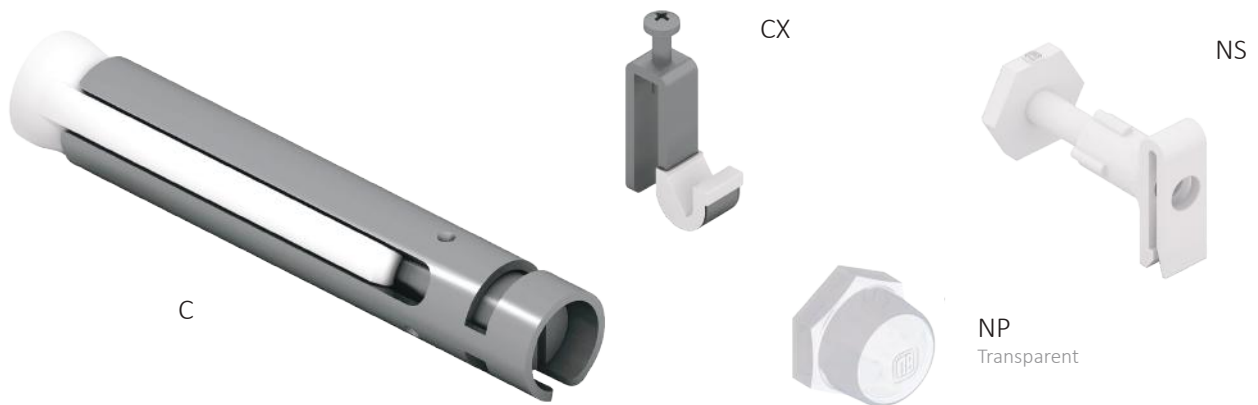

Distance C CX

Measures are expressed in millimeters

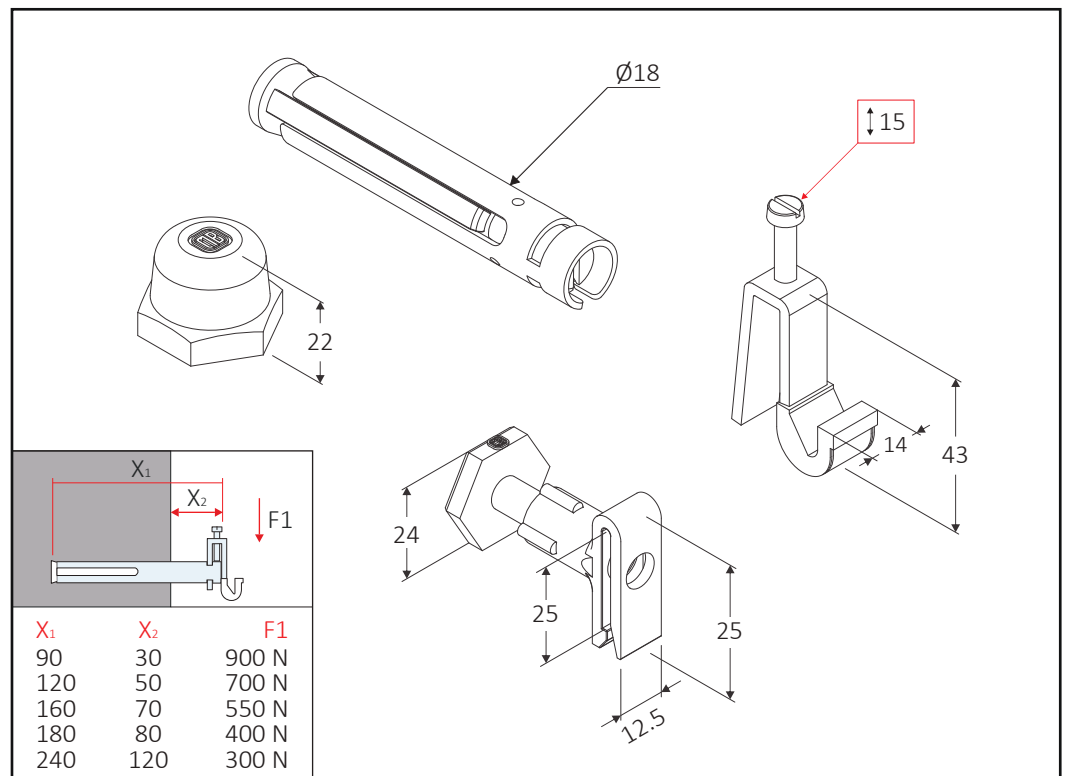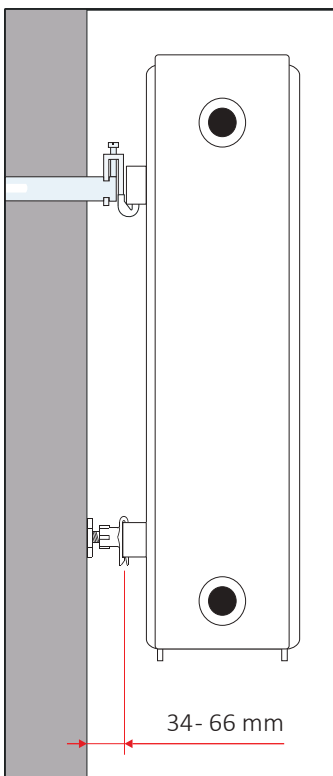


EXPANSION BRACKETS

Kit of two expansion brackets for horizontal and vertical steel panel radiators with handles and spacers **NS**. Adjustment for distance from wall (34-66 mm). Plastic insulators included. **NP**: transparent extension for spacer **NS**.

SC1: safety device anti-hooking for expansion bracket **CE**.





60592100	2x CE 100 + 2x NS	50	2500
60592130	2x CE 130 + 2x NS	50	2500
60592160	2x CE 160 + 2x NS	50	2000
60592200	2x CE 200 + 2x NS	50	1600
60592240	2x CE 240 + 2x NS	50	1600
60550001	SC1	100	2000
60020239	NP	100	5500

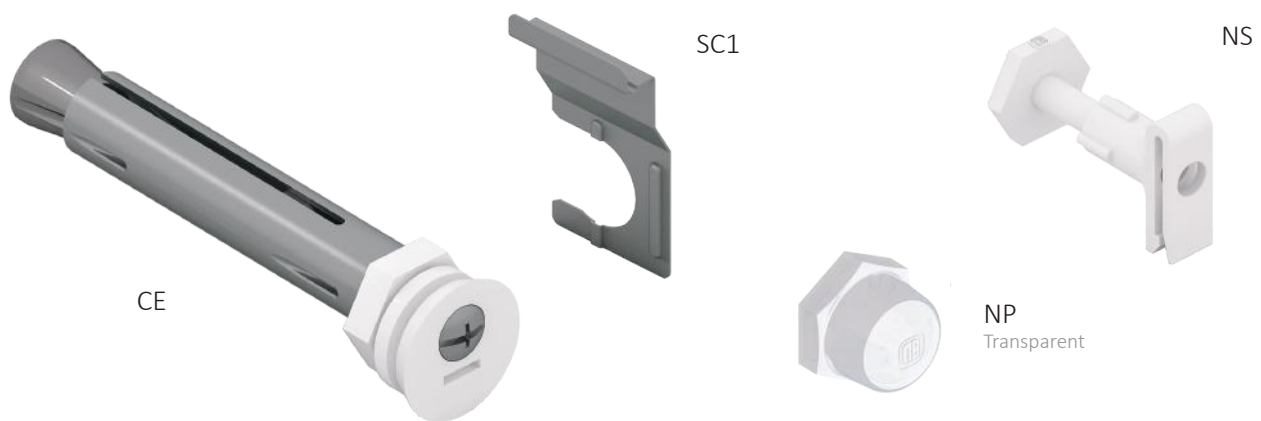

Distance CE

Measures are expressed in millimeters

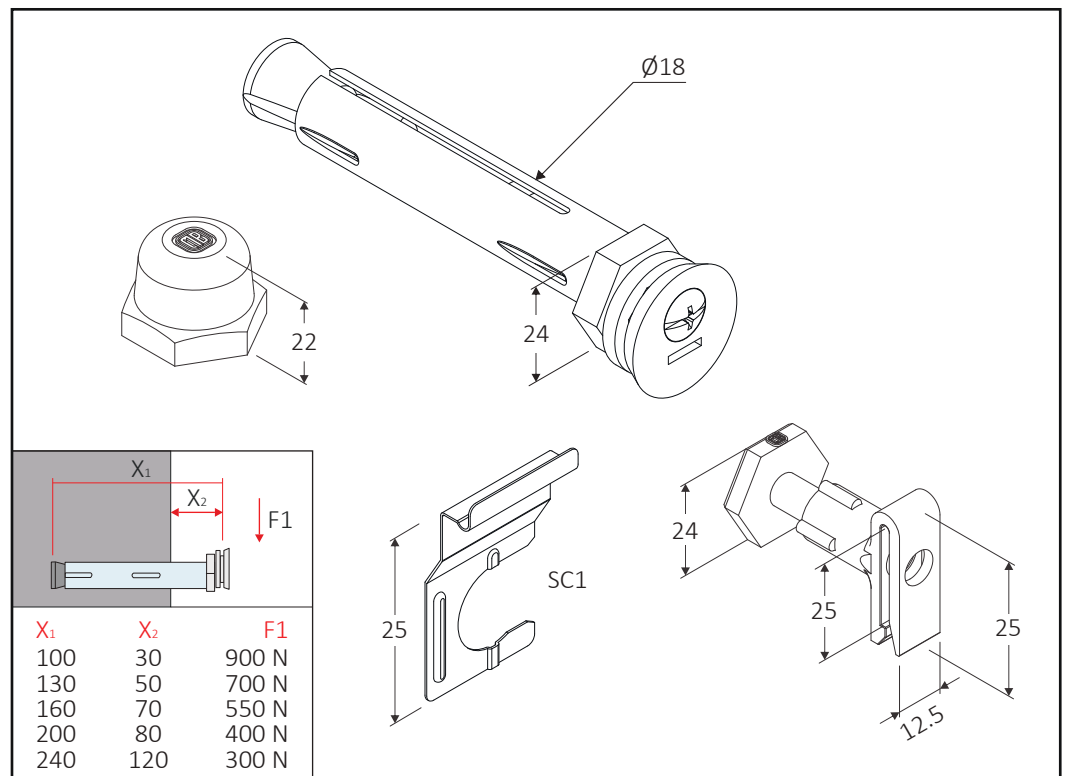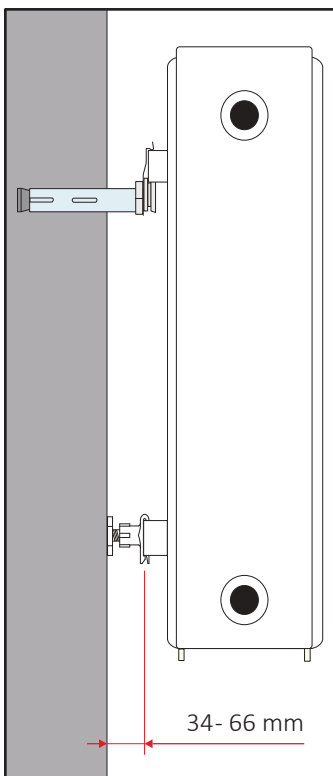


EXPANSION BRACKETS

Kit of two expansion brackets for horizontal and vertical steel panel radiators with handles and spacers **NS**. Adjustment for distance from wall (34-66 mm). Plastic insulators included. **SC2**: safety device anti-hooking for expansion bracket **CA**. **AS**: key for safety device anti-hooking **SC2**.




60594100	2x CA 100 + 2x NS	50	2500
60594130	2x CA 130 + 2x NS	50	2500
60594160	2x CA 160 + 2x NS	50	2000
60594200	2x CA 200 + 2x NS	50	1600
60594240	2x CA 240 + 2x NS	50	1600
60550002	100x SC2 + 4x AS	1	2000
60020239	NP	100	5500

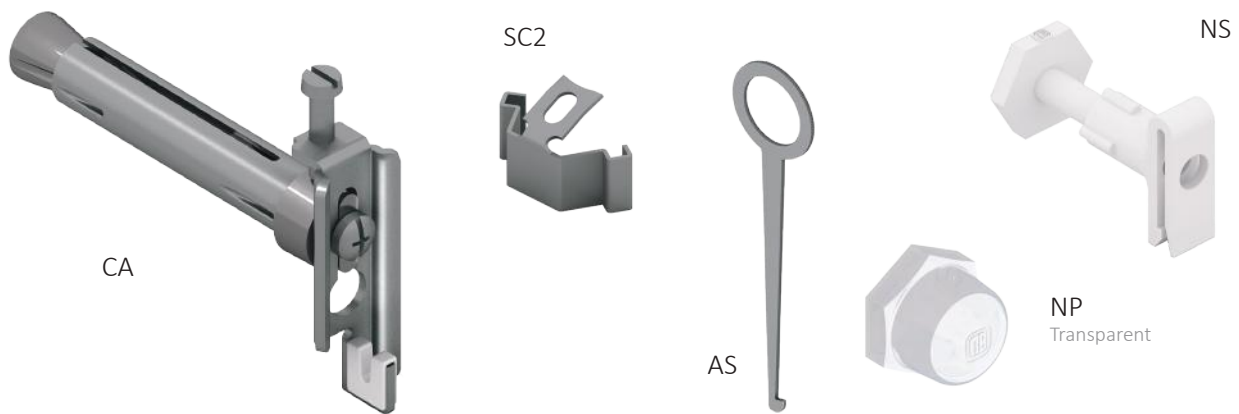


Distance CA

Measures are expressed in millimeters

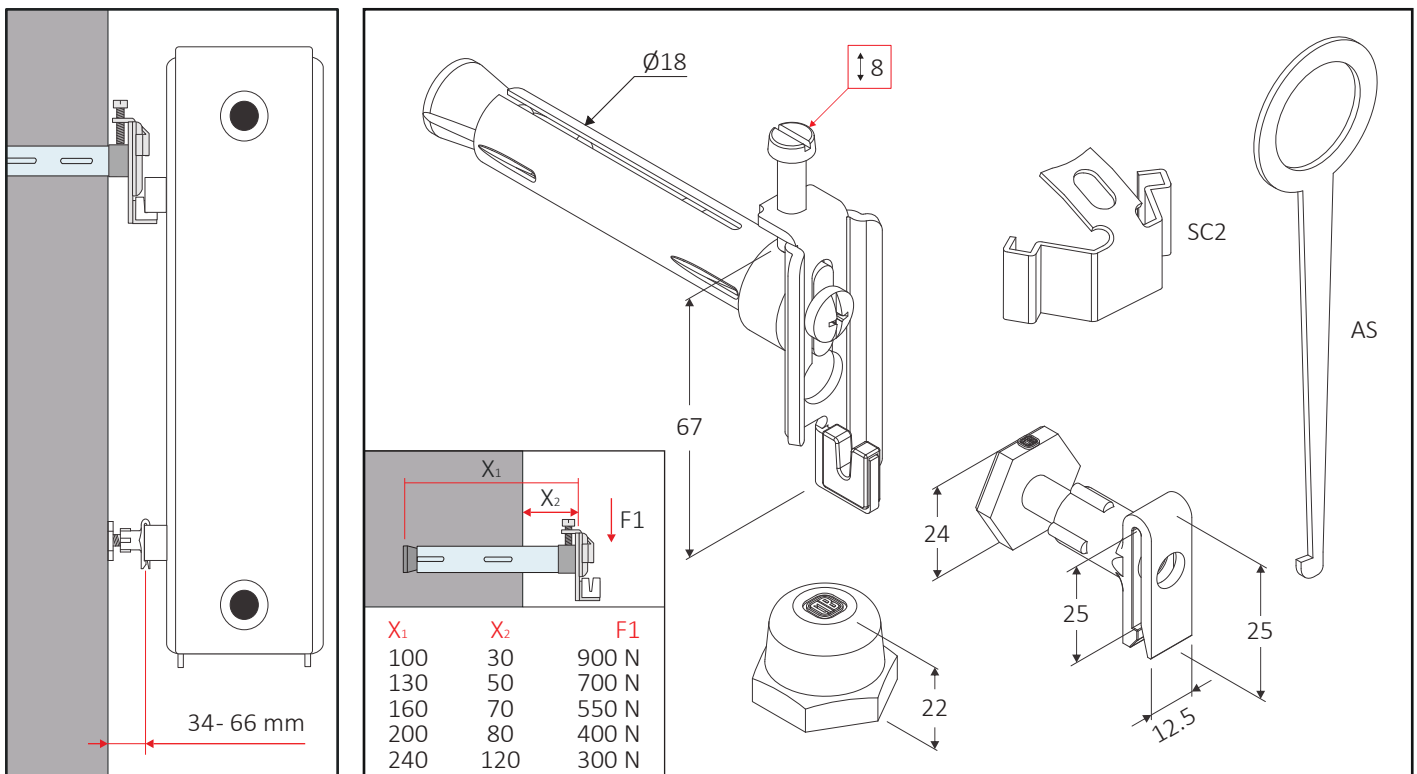

EXPANSION BRACKETS


Kit of two expansion brackets for horizontal and vertical steel panel radiators without handles. Plastic insulators included. Complies with VDI 6036.



CV6: BUDERUS, DL RADIATORS, RADSON




60586100	2x CE 100 + 2x CV6 100		AK3	50	800
60586130	2x CE 130 + 2x CV6 130		AK3	50	800
60586160	2x CE 160 + 2x CV6 160		AK3	50	800
60586200	2x CE 200 + 2x CV6 200		AK3	50	800
60586240	2x CE 240 + 2x CV6 240		AK3	50	800





CV10: HENRAD, KERMI, PURMO

60587100	2x CE 100 + 2x CV10 100		AK3	50	800
60587130	2x CE 130 + 2x CV10 130		AK3	50	800
60587160	2x CE 160 + 2x CV10 160		AK3	50	800
60587200	2x CE 200 + 2x CV10 200		AK3	50	1250
60587240	2x CE 240 + 2x CV10 240		AK3	50	1000

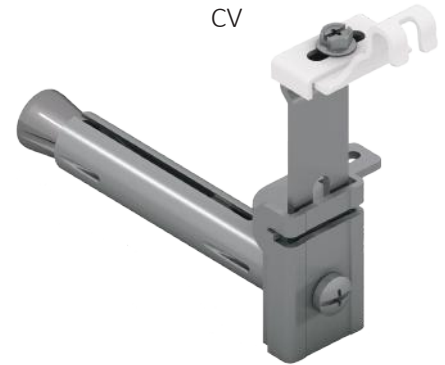

Regulation bracket CV

Measures are expressed in millimeters

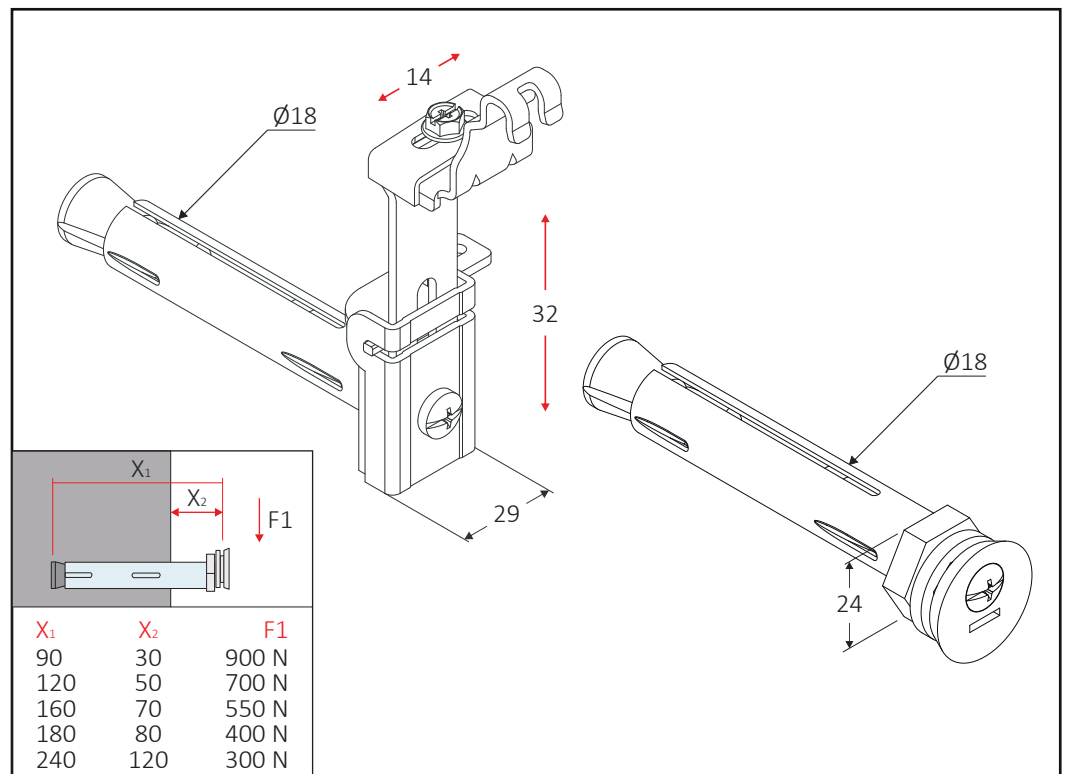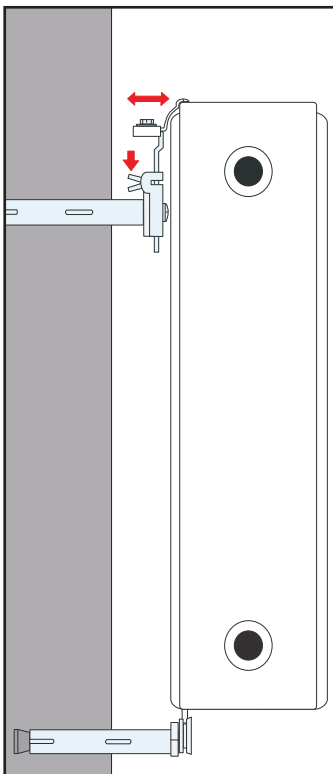


ACCESSORIES

Template with bypass for testing heating systems. **DB1**: connection $\frac{1}{2}$ " female.

DB2: connection $\frac{3}{4}$ " male.




60910001	DB1 $\frac{1}{2}$ " BYPASS	6	696
60910002	DB2 $\frac{3}{4}$ " BYPASS	6	696

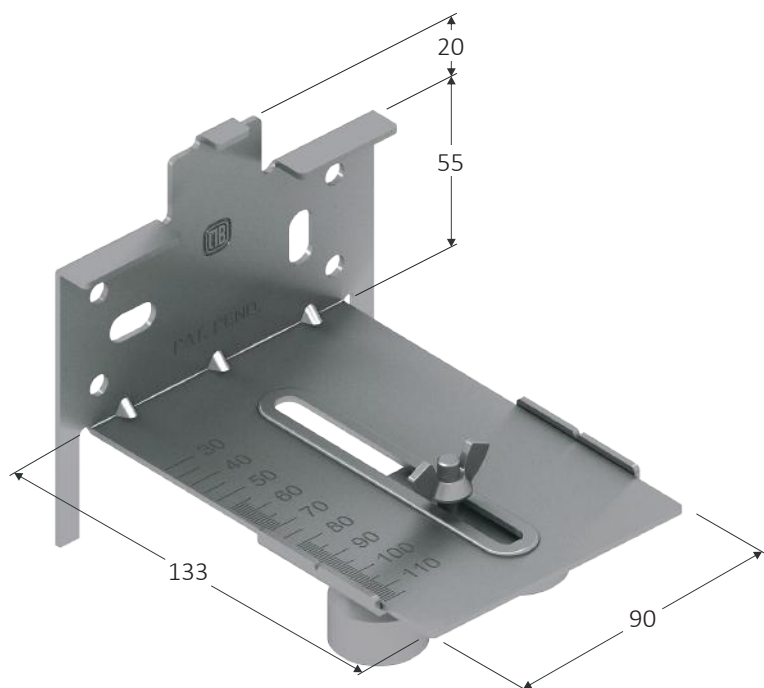


DB1

Connection $\frac{1}{2}$ " female

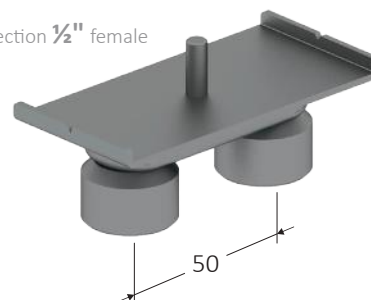


DB2

Connection $\frac{3}{4}$ " male

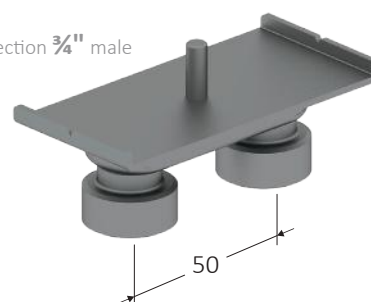

Template installation with **BYPASS** of $\frac{1}{2}$ " or $\frac{3}{4}$ " - sealing **10 BAR**

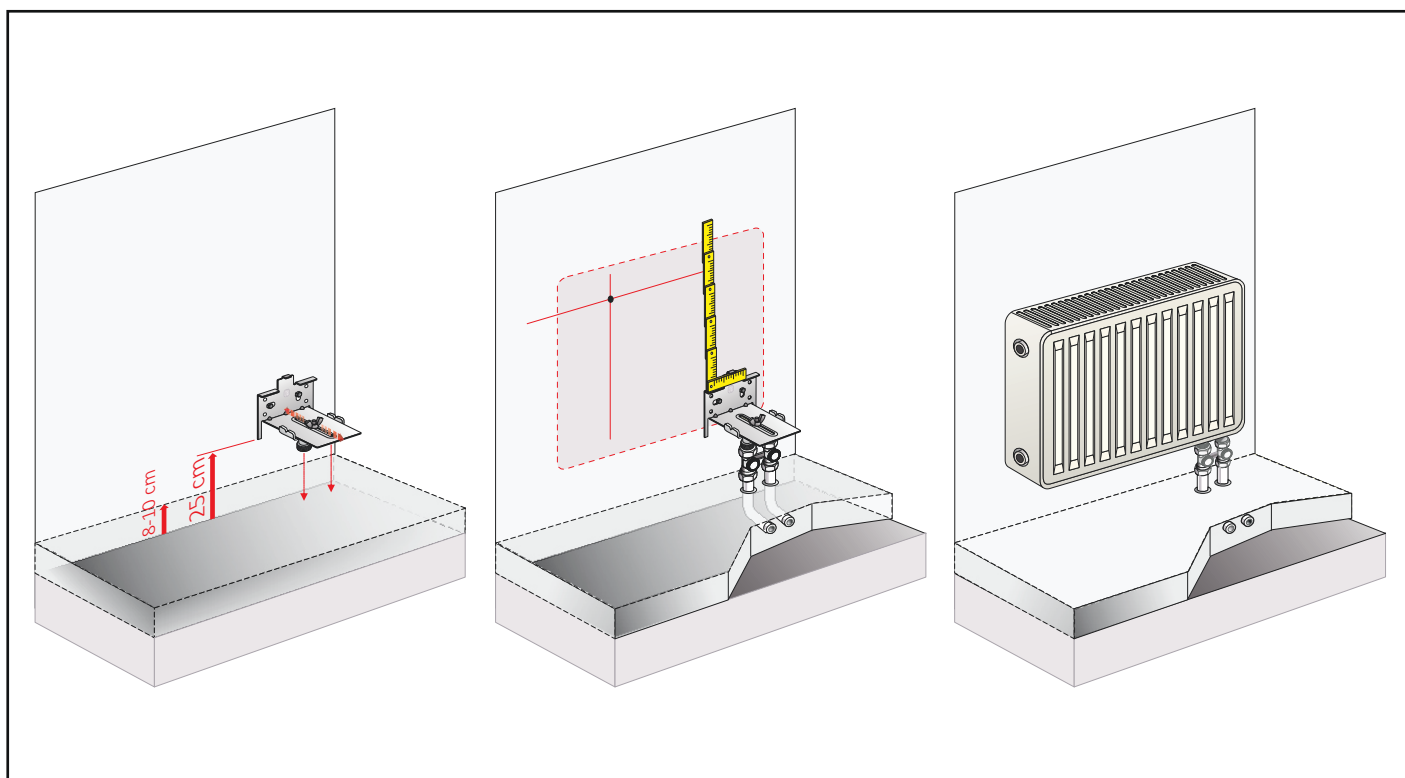

ACCESSORIES


Kit of two ledge holders **QX3** for double or triple steel panel radiators.



60751010	2x QX3	1	500
60751010T6	2x QX3/T6 V+N	1	500


QX3

Support for top shelf

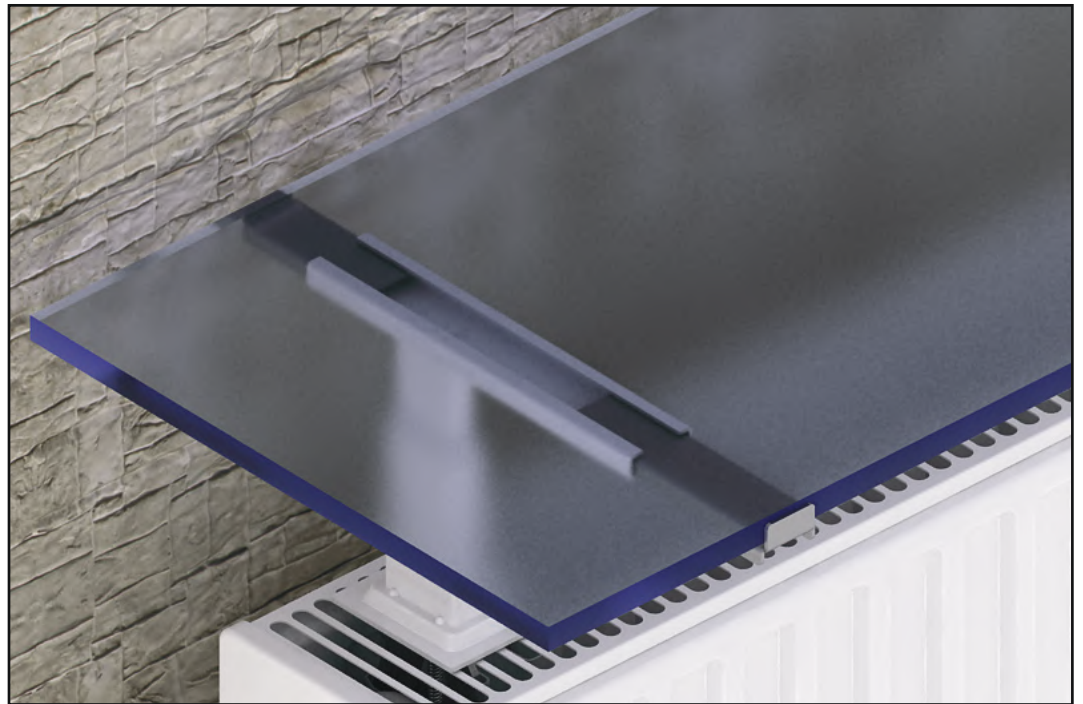



Regulations

Measures are expressed in millimeters



Assembly instructions

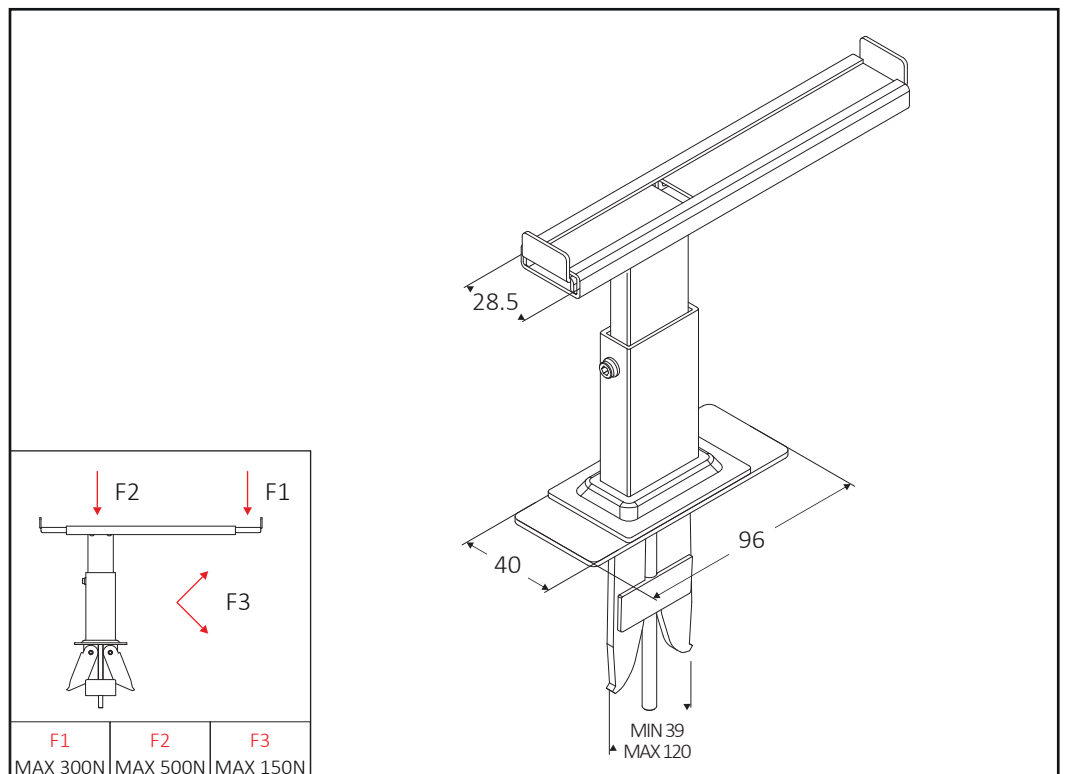

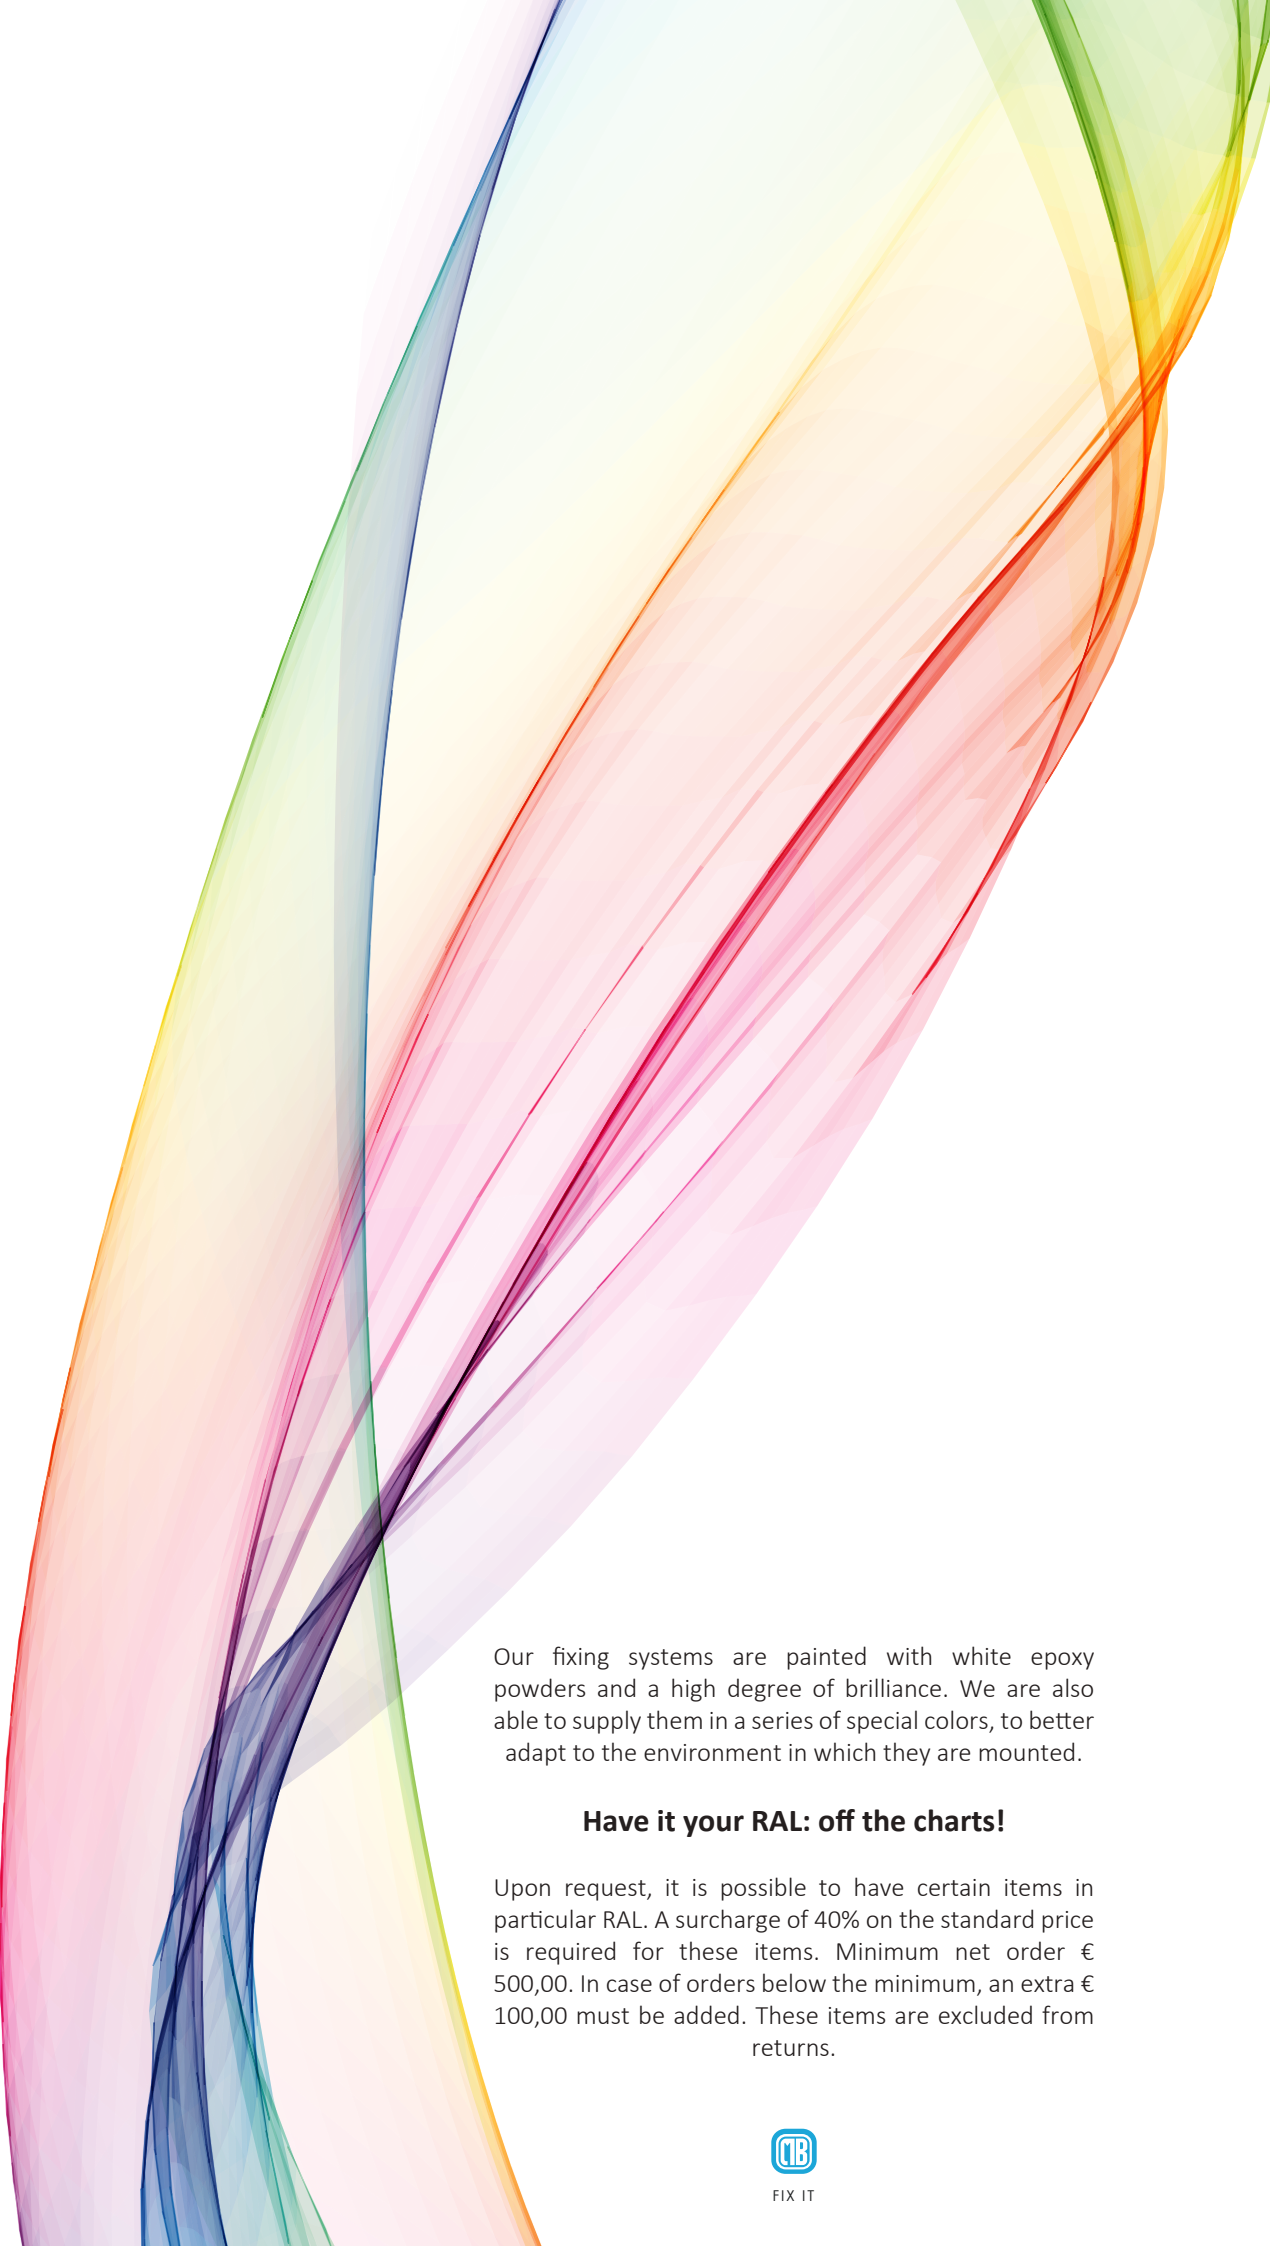

Our fixing systems are painted with white epoxy powders and a high degree of brilliance. We are also able to supply them in a series of special colors, to better adapt to the environment in which they are mounted.

Have it your RAL: off the charts!

Upon request, it is possible to have certain items in particular RAL. A surcharge of 40% on the standard price is required for these items. Minimum net order € 500,00. In case of orders below the minimum, an extra € 100,00 must be added. These items are excluded from returns.



FIX IT





The recent German directive **VDI 6036** is changing the way of thinking of installers, engineers and architects on safety in fixing radiators. Depending on the application and positioning of the radiator, the directive defines precise limits on the forces to be supported and the maximum permissible displacements. Higher standards are required in public places such as banks, stadiums, schools, hospitals. **TÜV SÜD** has tested compliance with the **class 3** specifications of the directive, of a series of MB FIX brackets for all types of radiator and application, in order to guarantee our customers, the safety of fixing in all situations. For all our customers we provide our machines to test the correct application of **VDI 6036**.



High-quality products by MB FIX are only for professionals from the trade. When choosing MB FIX to partner with, you can rely on perfect technology and receive a guarantee for safe and correct installation, as well as long-lasting products. Should there be any defects, you can of course, rely on the responsibility of MB FIX. You can for sure also count on MB FIX's spare parts service: Accessories and spare parts are available for many years thanks to long-term product ranges.





LET'S HELTER



LINEAHANDY.IT



LINEAHANDY



LET'SHELTER



LINEAHANDY





WE THINK THAT EVERY PROBLEM CAN BE SOLVED
WITH A TOUCH OF CREATIVITY

MB SRL - VIA MADONNA NERA 2/B
I - 31030 BORSO DEL GRAPPA (TV)

marketing@mb-fix.it

Ph. +39 0423 913800
Fx. +39 0423 542188